



Welcome to [E-XFL.COM](https://www.e-xfl.com)

### Understanding Embedded - FPGAs (Field Programmable Gate Array)

Embedded - FPGAs, or Field Programmable Gate Arrays, are advanced integrated circuits that offer unparalleled flexibility and performance for digital systems. Unlike traditional fixed-function logic devices, FPGAs can be programmed and reprogrammed to execute a wide array of logical operations, enabling customized functionality tailored to specific applications. This reprogrammability allows developers to iterate designs quickly and implement complex functions without the need for custom hardware.

### Applications of Embedded - FPGAs

The versatility of Embedded - FPGAs makes them indispensable in numerous fields. In telecommunications.

#### Details

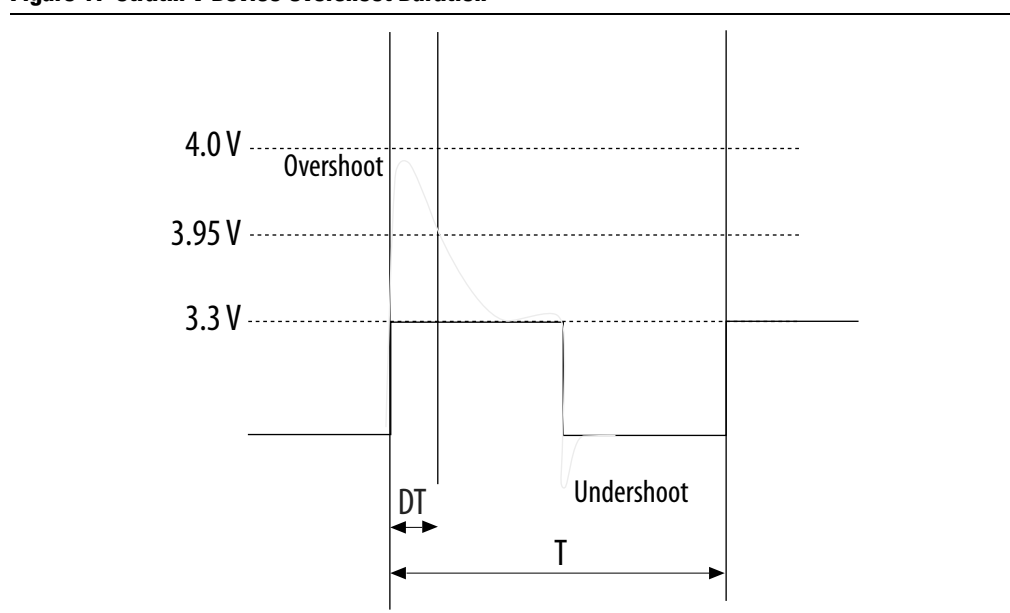
|                                |                                                                                                                                     |
|--------------------------------|-------------------------------------------------------------------------------------------------------------------------------------|
| Product Status                 | Obsolete                                                                                                                            |
| Number of LABs/CLBs            | 128300                                                                                                                              |
| Number of Logic Elements/Cells | 340000                                                                                                                              |
| Total RAM Bits                 | 19456000                                                                                                                            |
| Number of I/O                  | 600                                                                                                                                 |
| Number of Gates                | -                                                                                                                                   |
| Voltage - Supply               | 0.82V ~ 0.88V                                                                                                                       |
| Mounting Type                  | Surface Mount                                                                                                                       |
| Operating Temperature          | 0°C ~ 85°C (TJ)                                                                                                                     |
| Package / Case                 | 1152-BBGA, FCBGA                                                                                                                    |
| Supplier Device Package        | 1152-FBGA (35x35)                                                                                                                   |
| Purchase URL                   | <a href="https://www.e-xfl.com/product-detail/intel/5sgxma3k2f35c3n">https://www.e-xfl.com/product-detail/intel/5sgxma3k2f35c3n</a> |

Table 5 lists the maximum allowed input overshoot voltage and the duration of the overshoot voltage as a percentage of device lifetime. The maximum allowed overshoot duration is specified as a percentage of high time over the lifetime of the device. A DC signal is equivalent to 100% of the duty cycle. For example, a signal that overshoots to 3.95 V can be at 3.95 V for only ~21% over the lifetime of the device; for a device lifetime of 10 years, the overshoot duration amounts to ~2 years.

**Table 5. Maximum Allowed Overshoot During Transitions**

| Symbol     | Description      | Condition (V) | Overshoot Duration as %<br>@ $T_J = 100^{\circ}\text{C}$ | Unit |
|------------|------------------|---------------|----------------------------------------------------------|------|
| $V_i$ (AC) | AC input voltage | 3.8           | 100                                                      | %    |
|            |                  | 3.85          | 64                                                       | %    |
|            |                  | 3.9           | 36                                                       | %    |
|            |                  | 3.95          | 21                                                       | %    |
|            |                  | 4             | 12                                                       | %    |
|            |                  | 4.05          | 7                                                        | %    |
|            |                  | 4.1           | 4                                                        | %    |
|            |                  | 4.15          | 2                                                        | %    |
|            |                  | 4.2           | 1                                                        | %    |

**Figure 1. Stratix V Device Overshoot Duration**



## Recommended Operating Conditions

This section lists the functional operating limits for the AC and DC parameters for Stratix V devices. Table 6 lists the steady-state voltage and current values expected from Stratix V devices. Power supply ramps must all be strictly monotonic, without plateaus.

**Table 6. Recommended Operating Conditions for Stratix V Devices (Part 1 of 2)**

| Symbol                            | Description                                                                                                       | Condition  | Min <sup>(4)</sup> | Typ  | Max <sup>(4)</sup> | Unit |
|-----------------------------------|-------------------------------------------------------------------------------------------------------------------|------------|--------------------|------|--------------------|------|
| V <sub>CC</sub>                   | Core voltage and periphery circuitry power supply (C1, C2, I2, and I3YY speed grades)                             | —          | 0.87               | 0.9  | 0.93               | V    |
|                                   | Core voltage and periphery circuitry power supply (C2L, C3, C4, I2L, I3, I3L, and I4 speed grades) <sup>(3)</sup> | —          | 0.82               | 0.85 | 0.88               | V    |
| V <sub>CCPT</sub>                 | Power supply for programmable power technology                                                                    | —          | 1.45               | 1.50 | 1.55               | V    |
| V <sub>CC_AUX</sub>               | Auxiliary supply for the programmable power technology                                                            | —          | 2.375              | 2.5  | 2.625              | V    |
| V <sub>CCPD</sub> <sup>(1)</sup>  | I/O pre-driver (3.0 V) power supply                                                                               | —          | 2.85               | 3.0  | 3.15               | V    |
|                                   | I/O pre-driver (2.5 V) power supply                                                                               | —          | 2.375              | 2.5  | 2.625              | V    |
| V <sub>CCIO</sub>                 | I/O buffers (3.0 V) power supply                                                                                  | —          | 2.85               | 3.0  | 3.15               | V    |
|                                   | I/O buffers (2.5 V) power supply                                                                                  | —          | 2.375              | 2.5  | 2.625              | V    |
|                                   | I/O buffers (1.8 V) power supply                                                                                  | —          | 1.71               | 1.8  | 1.89               | V    |
|                                   | I/O buffers (1.5 V) power supply                                                                                  | —          | 1.425              | 1.5  | 1.575              | V    |
|                                   | I/O buffers (1.35 V) power supply                                                                                 | —          | 1.283              | 1.35 | 1.45               | V    |
|                                   | I/O buffers (1.25 V) power supply                                                                                 | —          | 1.19               | 1.25 | 1.31               | V    |
|                                   | I/O buffers (1.2 V) power supply                                                                                  | —          | 1.14               | 1.2  | 1.26               | V    |
| V <sub>CCPGM</sub>                | Configuration pins (3.0 V) power supply                                                                           | —          | 2.85               | 3.0  | 3.15               | V    |
|                                   | Configuration pins (2.5 V) power supply                                                                           | —          | 2.375              | 2.5  | 2.625              | V    |
|                                   | Configuration pins (1.8 V) power supply                                                                           | —          | 1.71               | 1.8  | 1.89               | V    |
| V <sub>CCA_FPLL</sub>             | PLL analog voltage regulator power supply                                                                         | —          | 2.375              | 2.5  | 2.625              | V    |
| V <sub>CCD_FPLL</sub>             | PLL digital voltage regulator power supply                                                                        | —          | 1.45               | 1.5  | 1.55               | V    |
| V <sub>CCBAT</sub> <sup>(2)</sup> | Battery back-up power supply (For design security volatile key register)                                          | —          | 1.2                | —    | 3.0                | V    |
| V <sub>I</sub>                    | DC input voltage                                                                                                  | —          | −0.5               | —    | 3.6                | V    |
| V <sub>O</sub>                    | Output voltage                                                                                                    | —          | 0                  | —    | V <sub>CCIO</sub>  | V    |
| T <sub>J</sub>                    | Operating junction temperature                                                                                    | Commercial | 0                  | —    | 85                 | °C   |
|                                   |                                                                                                                   | Industrial | −40                | —    | 100                | °C   |

**Table 18. Single-Ended SSTL, HSTL, and HSUL I/O Reference Voltage Specifications for Stratix V Devices**

| I/O Standard            | $V_{CCIO}$ (V) |      |       | $V_{REF}$ (V)     |                  |                   | $V_{TT}$ (V)      |                  |                   |
|-------------------------|----------------|------|-------|-------------------|------------------|-------------------|-------------------|------------------|-------------------|
|                         | Min            | Typ  | Max   | Min               | Typ              | Max               | Min               | Typ              | Max               |
| SSTL-2<br>Class I, II   | 2.375          | 2.5  | 2.625 | $0.49 * V_{CCIO}$ | $0.5 * V_{CCIO}$ | $0.51 * V_{CCIO}$ | $V_{REF} - 0.04$  | $V_{REF}$        | $V_{REF} + 0.04$  |
| SSTL-18<br>Class I, II  | 1.71           | 1.8  | 1.89  | 0.833             | 0.9              | 0.969             | $V_{REF} - 0.04$  | $V_{REF}$        | $V_{REF} + 0.04$  |
| SSTL-15<br>Class I, II  | 1.425          | 1.5  | 1.575 | $0.49 * V_{CCIO}$ | $0.5 * V_{CCIO}$ | $0.51 * V_{CCIO}$ | $0.49 * V_{CCIO}$ | $0.5 * V_{CCIO}$ | $0.51 * V_{CCIO}$ |
| SSTL-135<br>Class I, II | 1.283          | 1.35 | 1.418 | $0.49 * V_{CCIO}$ | $0.5 * V_{CCIO}$ | $0.51 * V_{CCIO}$ | $0.49 * V_{CCIO}$ | $0.5 * V_{CCIO}$ | $0.51 * V_{CCIO}$ |
| SSTL-125<br>Class I, II | 1.19           | 1.25 | 1.26  | $0.49 * V_{CCIO}$ | $0.5 * V_{CCIO}$ | $0.51 * V_{CCIO}$ | $0.49 * V_{CCIO}$ | $0.5 * V_{CCIO}$ | $0.51 * V_{CCIO}$ |
| SSTL-12<br>Class I, II  | 1.14           | 1.20 | 1.26  | $0.49 * V_{CCIO}$ | $0.5 * V_{CCIO}$ | $0.51 * V_{CCIO}$ | $0.49 * V_{CCIO}$ | $0.5 * V_{CCIO}$ | $0.51 * V_{CCIO}$ |
| HSTL-18<br>Class I, II  | 1.71           | 1.8  | 1.89  | 0.85              | 0.9              | 0.95              | —                 | $V_{CCIO}/2$     | —                 |
| HSTL-15<br>Class I, II  | 1.425          | 1.5  | 1.575 | 0.68              | 0.75             | 0.9               | —                 | $V_{CCIO}/2$     | —                 |
| HSTL-12<br>Class I, II  | 1.14           | 1.2  | 1.26  | $0.47 * V_{CCIO}$ | $0.5 * V_{CCIO}$ | $0.53 * V_{CCIO}$ | —                 | $V_{CCIO}/2$     | —                 |
| HSUL-12                 | 1.14           | 1.2  | 1.3   | $0.49 * V_{CCIO}$ | $0.5 * V_{CCIO}$ | $0.51 * V_{CCIO}$ | —                 | —                | —                 |

**Table 19. Single-Ended SSTL, HSTL, and HSUL I/O Standards Signal Specifications for Stratix V Devices (Part 1 of 2)**

| I/O Standard            | $V_{IL(DC)}$ (V) |                   | $V_{IH(DC)}$ (V)  |                  | $V_{IL(AC)}$ (V)  | $V_{IH(AC)}$ (V)  | $V_{OL}$ (V)     | $V_{OH}$ (V)      | $I_{OI}$ (mA) | $I_{OH}$ (mA) |
|-------------------------|------------------|-------------------|-------------------|------------------|-------------------|-------------------|------------------|-------------------|---------------|---------------|
|                         | Min              | Max               | Min               | Max              | Max               | Min               | Max              | Min               |               |               |
| SSTL-2<br>Class I       | -0.3             | $V_{REF} - 0.15$  | $V_{REF} + 0.15$  | $V_{CCIO} + 0.3$ | $V_{REF} - 0.31$  | $V_{REF} + 0.31$  | $V_{TT} - 0.608$ | $V_{TT} + 0.608$  | 8.1           | -8.1          |
| SSTL-2<br>Class II      | -0.3             | $V_{REF} - 0.15$  | $V_{REF} + 0.15$  | $V_{CCIO} + 0.3$ | $V_{REF} - 0.31$  | $V_{REF} + 0.31$  | $V_{TT} - 0.81$  | $V_{TT} + 0.81$   | 16.2          | -16.2         |
| SSTL-18<br>Class I      | -0.3             | $V_{REF} - 0.125$ | $V_{REF} + 0.125$ | $V_{CCIO} + 0.3$ | $V_{REF} - 0.25$  | $V_{REF} + 0.25$  | $V_{TT} - 0.603$ | $V_{TT} + 0.603$  | 6.7           | -6.7          |
| SSTL-18<br>Class II     | -0.3             | $V_{REF} - 0.125$ | $V_{REF} + 0.125$ | $V_{CCIO} + 0.3$ | $V_{REF} - 0.25$  | $V_{REF} + 0.25$  | 0.28             | $V_{CCIO} - 0.28$ | 13.4          | -13.4         |
| SSTL-15<br>Class I      | —                | $V_{REF} - 0.1$   | $V_{REF} + 0.1$   | —                | $V_{REF} - 0.175$ | $V_{REF} + 0.175$ | $0.2 * V_{CCIO}$ | $0.8 * V_{CCIO}$  | 8             | -8            |
| SSTL-15<br>Class II     | —                | $V_{REF} - 0.1$   | $V_{REF} + 0.1$   | —                | $V_{REF} - 0.175$ | $V_{REF} + 0.175$ | $0.2 * V_{CCIO}$ | $0.8 * V_{CCIO}$  | 16            | -16           |
| SSTL-135<br>Class I, II | —                | $V_{REF} - 0.09$  | $V_{REF} + 0.09$  | —                | $V_{REF} - 0.16$  | $V_{REF} + 0.16$  | $0.2 * V_{CCIO}$ | $0.8 * V_{CCIO}$  | —             | —             |
| SSTL-125<br>Class I, II | —                | $V_{REF} - 0.85$  | $V_{REF} + 0.85$  | —                | $V_{REF} - 0.15$  | $V_{REF} + 0.15$  | $0.2 * V_{CCIO}$ | $0.8 * V_{CCIO}$  | —             | —             |
| SSTL-12<br>Class I, II  | —                | $V_{REF} - 0.1$   | $V_{REF} + 0.1$   | —                | $V_{REF} - 0.15$  | $V_{REF} + 0.15$  | $0.2 * V_{CCIO}$ | $0.8 * V_{CCIO}$  | —             | —             |

**Table 21. Differential HSTL and HSUL I/O Standards for Stratix V Devices (Part 2 of 2)**

| I/O Standard        | $V_{CCIO}$ (V) |     |      | $V_{DIF(DC)}$ (V) |                  | $V_{X(AC)}$ (V)         |                  |                         | $V_{CM(DC)}$ (V) |                  |                  | $V_{DIF(AC)}$ (V) |                   |
|---------------------|----------------|-----|------|-------------------|------------------|-------------------------|------------------|-------------------------|------------------|------------------|------------------|-------------------|-------------------|
|                     | Min            | Typ | Max  | Min               | Max              | Min                     | Typ              | Max                     | Min              | Typ              | Max              | Min               | Max               |
| HSTL-12 Class I, II | 1.14           | 1.2 | 1.26 | 0.16              | $V_{CCIO} + 0.3$ | —                       | $0.5^* V_{CCIO}$ | —                       | $0.4^* V_{CCIO}$ | $0.5^* V_{CCIO}$ | $0.6^* V_{CCIO}$ | 0.3               | $V_{CCIO} + 0.48$ |
| HSUL-12             | 1.14           | 1.2 | 1.3  | 0.26              | 0.26             | $0.5^* V_{CCIO} - 0.12$ | $0.5^* V_{CCIO}$ | $0.5^* V_{CCIO} + 0.12$ | $0.4^* V_{CCIO}$ | $0.5^* V_{CCIO}$ | $0.6^* V_{CCIO}$ | 0.44              | 0.44              |

**Table 22. Differential I/O Standard Specifications for Stratix V Devices <sup>(7)</sup>**

| I/O Standard                   | $V_{CCIO}$ (V) <sup>(10)</sup>                                                                                                                                                                                       |     |       | $V_{ID}$ (mV) <sup>(8)</sup> |                   |     | $V_{ICM(DC)}$ (V) |                         |       | $V_{OD}$ (V) <sup>(6)</sup> |     |     | $V_{OCM}$ (V) <sup>(6)</sup> |      |       |
|--------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----|-------|------------------------------|-------------------|-----|-------------------|-------------------------|-------|-----------------------------|-----|-----|------------------------------|------|-------|
|                                | Min                                                                                                                                                                                                                  | Typ | Max   | Min                          | Condition         | Max | Min               | Condition               | Max   | Min                         | Typ | Max | Min                          | Typ  | Max   |
| PCML                           | Transmitter, receiver, and input reference clock pins of the high-speed transceivers use the PCML I/O standard. For transmitter, receiver, and reference clock I/O pin specifications, refer to Table 23 on page 18. |     |       |                              |                   |     |                   |                         |       |                             |     |     |                              |      |       |
| 2.5 V LVDS <sup>(1)</sup>      | 2.375                                                                                                                                                                                                                | 2.5 | 2.625 | 100                          | $V_{CM} = 1.25$ V | —   | 0.05              | $D_{MAX} \leq 700$ Mbps | 1.8   | 0.247                       | —   | 0.6 | 1.125                        | 1.25 | 1.375 |
|                                |                                                                                                                                                                                                                      |     |       |                              |                   | —   | 1.05              | $D_{MAX} > 700$ Mbps    | 1.55  | 0.247                       | —   | 0.6 | 1.125                        | 1.25 | 1.375 |
| BLVDS <sup>(5)</sup>           | 2.375                                                                                                                                                                                                                | 2.5 | 2.625 | 100                          | —                 | —   | —                 | —                       | —     | —                           | —   | —   | —                            | —    | —     |
| RSDS (HIO) <sup>(2)</sup>      | 2.375                                                                                                                                                                                                                | 2.5 | 2.625 | 100                          | $V_{CM} = 1.25$ V | —   | 0.3               | —                       | 1.4   | 0.1                         | 0.2 | 0.6 | 0.5                          | 1.2  | 1.4   |
| Mini-LVDS (HIO) <sup>(3)</sup> | 2.375                                                                                                                                                                                                                | 2.5 | 2.625 | 200                          | —                 | 600 | 0.4               | —                       | 1.325 | 0.25                        | —   | 0.6 | 1                            | 1.2  | 1.4   |
| LVPECL <sup>(4), (9)</sup>     | —                                                                                                                                                                                                                    | —   | —     | 300                          | —                 | —   | 0.6               | $D_{MAX} \leq 700$ Mbps | 1.8   | —                           | —   | —   | —                            | —    | —     |
|                                | —                                                                                                                                                                                                                    | —   | —     | 300                          | —                 | —   | 1                 | $D_{MAX} > 700$ Mbps    | 1.6   | —                           | —   | —   | —                            | —    | —     |

**Notes to Table 22:**

- (1) For optimized LVDS receiver performance, the receiver voltage input range must be between 1.0 V to 1.6 V for data rates above 700 Mbps, and 0 V to 1.85 V for data rates below 700 Mbps.
- (2) For optimized RSDS receiver performance, the receiver voltage input range must be between 0.25 V to 1.45 V.
- (3) For optimized Mini-LVDS receiver performance, the receiver voltage input range must be between 0.3 V to 1.425 V.
- (4) For optimized LVPECL receiver performance, the receiver voltage input range must be between 0.85 V to 1.75 V for data rate above 700 Mbps and 0.45 V to 1.95 V for data rate below 700 Mbps.
- (5) There are no fixed  $V_{ICM}$ ,  $V_{OD}$ , and  $V_{OCM}$  specifications for BLVDS. They depend on the system topology.
- (6) RL range:  $90 \leq RL \leq 110 \Omega$ .
- (7) The 1.4-V and 1.5-V PCML transceiver I/O standard specifications are described in "Transceiver Performance Specifications" on page 18.
- (8) The minimum  $V_{ID}$  value is applicable over the entire common mode range,  $V_{CM}$ .
- (9) LVPECL is only supported on dedicated clock input pins.
- (10) Differential inputs are powered by VCCPD which requires 2.5 V.

## Power Consumption

Altera offers two ways to estimate power consumption for a design—the Excel-based Early Power Estimator and the Quartus® II PowerPlay Power Analyzer feature.

**Table 23. Transceiver Specifications for Stratix V GX and GS Devices <sup>(1)</sup> (Part 2 of 7)**

| Symbol/<br>Description                                             | Conditions                                             | Transceiver Speed<br>Grade 1     |                   |      | Transceiver Speed<br>Grade 2     |                   |      | Transceiver Speed<br>Grade 3     |                   |      | Unit        |
|--------------------------------------------------------------------|--------------------------------------------------------|----------------------------------|-------------------|------|----------------------------------|-------------------|------|----------------------------------|-------------------|------|-------------|
|                                                                    |                                                        | Min                              | Typ               | Max  | Min                              | Typ               | Max  | Min                              | Typ               | Max  |             |
| Spread-spectrum<br>downspread                                      | PCIe                                                   | —                                | 0 to<br>-0.5      | —    | —                                | 0 to<br>-0.5      | —    | —                                | 0 to<br>-0.5      | —    | %           |
| On-chip<br>termination<br>resistors <sup>(21)</sup>                | —                                                      | —                                | 100               | —    | —                                | 100               | —    | —                                | 100               | —    | $\Omega$    |
| Absolute $V_{MAX}$ <sup>(5)</sup>                                  | Dedicated<br>reference<br>clock pin                    | —                                | —                 | 1.6  | —                                | —                 | 1.6  | —                                | —                 | 1.6  | V           |
|                                                                    | RX reference<br>clock pin                              | —                                | —                 | 1.2  | —                                | —                 | 1.2  | —                                | —                 | 1.2  |             |
| Absolute $V_{MIN}$                                                 | —                                                      | -0.4                             | —                 | —    | -0.4                             | —                 | —    | -0.4                             | —                 | —    | V           |
| Peak-to-peak<br>differential input<br>voltage                      | —                                                      | 200                              | —                 | 1600 | 200                              | —                 | 1600 | 200                              | —                 | 1600 | mV          |
| $V_{ICM}$ (AC<br>coupled) <sup>(3)</sup>                           | Dedicated<br>reference<br>clock pin                    | 1050/1000/900/850 <sup>(2)</sup> |                   |      | 1050/1000/900/850 <sup>(2)</sup> |                   |      | 1050/1000/900/850 <sup>(2)</sup> |                   |      | mV          |
|                                                                    | RX reference<br>clock pin                              | 1.0/0.9/0.85 <sup>(4)</sup>      |                   |      | 1.0/0.9/0.85 <sup>(4)</sup>      |                   |      | 1.0/0.9/0.85 <sup>(4)</sup>      |                   |      | V           |
| $V_{ICM}$ (DC coupled)                                             | HCSL I/O<br>standard for<br>PCIe<br>reference<br>clock | 250                              | —                 | 550  | 250                              | —                 | 550  | 250                              | —                 | 550  | mV          |
| Transmitter<br>REFCLK Phase<br>Noise<br>(622 MHz) <sup>(20)</sup>  | 100 Hz                                                 | —                                | —                 | -70  | —                                | —                 | -70  | —                                | —                 | -70  | dBc/Hz      |
|                                                                    | 1 kHz                                                  | —                                | —                 | -90  | —                                | —                 | -90  | —                                | —                 | -90  | dBc/Hz      |
|                                                                    | 10 kHz                                                 | —                                | —                 | -100 | —                                | —                 | -100 | —                                | —                 | -100 | dBc/Hz      |
|                                                                    | 100 kHz                                                | —                                | —                 | -110 | —                                | —                 | -110 | —                                | —                 | -110 | dBc/Hz      |
|                                                                    | $\geq 1$ MHz                                           | —                                | —                 | -120 | —                                | —                 | -120 | —                                | —                 | -120 | dBc/Hz      |
| Transmitter<br>REFCLK Phase<br>Jitter<br>(100 MHz) <sup>(17)</sup> | 10 kHz to<br>1.5 MHz<br>(PCIe)                         | —                                | —                 | 3    | —                                | —                 | 3    | —                                | —                 | 3    | ps<br>(rms) |
| $R_{REF}$ <sup>(19)</sup>                                          | —                                                      | —                                | 1800<br>$\pm 1\%$ | —    | —                                | 1800<br>$\pm 1\%$ | —    | —                                | 1800<br>$\pm 1\%$ | —    | $\Omega$    |
| <b>Transceiver Clocks</b>                                          |                                                        |                                  |                   |      |                                  |                   |      |                                  |                   |      |             |
| fixedclk clock<br>frequency                                        | PCIe<br>Receiver<br>Detect                             | —                                | 100<br>or<br>125  | —    | —                                | 100<br>or<br>125  | —    | —                                | 100<br>or<br>125  | —    | MHz         |

**Table 23. Transceiver Specifications for Stratix V GX and GS Devices <sup>(1)</sup> (Part 3 of 7)**

| Symbol/<br>Description                                                                                                                    | Conditions                                                   | Transceiver Speed<br>Grade 1                         |     |       | Transceiver Speed<br>Grade 2 |     |       | Transceiver Speed<br>Grade 3 |     |                          | Unit |
|-------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------|------------------------------------------------------|-----|-------|------------------------------|-----|-------|------------------------------|-----|--------------------------|------|
|                                                                                                                                           |                                                              | Min                                                  | Typ | Max   | Min                          | Typ | Max   | Min                          | Typ | Max                      |      |
| Reconfiguration<br>clock<br>( <i>mgmt_clk_clk</i> )<br>frequency                                                                          | —                                                            | 100                                                  | —   | 125   | 100                          | —   | 125   | 100                          | —   | 125                      | MHz  |
| <b>Receiver</b>                                                                                                                           |                                                              |                                                      |     |       |                              |     |       |                              |     |                          |      |
| Supported I/O<br>Standards                                                                                                                | —                                                            | 1.4-V PCML, 1.5-V PCML, 2.5-V PCML, LVPECL, and LVDS |     |       |                              |     |       |                              |     |                          |      |
| Data rate<br>(Standard PCS)<br>(9), (23)                                                                                                  | —                                                            | 600                                                  | —   | 12200 | 600                          | —   | 12200 | 600                          | —   | 8500/<br>10312.5<br>(24) | Mbps |
| Data rate<br>(10G PCS) (9), (23)                                                                                                          | —                                                            | 600                                                  | —   | 14100 | 600                          | —   | 12500 | 600                          | —   | 8500/<br>10312.5<br>(24) | Mbps |
| Absolute $V_{MAX}$ for<br>a receiver pin <sup>(5)</sup>                                                                                   | —                                                            | —                                                    | —   | 1.2   | —                            | —   | 1.2   | —                            | —   | 1.2                      | V    |
| Absolute $V_{MIN}$ for<br>a receiver pin                                                                                                  | —                                                            | −0.4                                                 | —   | —     | −0.4                         | —   | —     | −0.4                         | —   | —                        | V    |
| Maximum peak-<br>to-peak<br>differential input<br>voltage $V_{ID}$ (diff p-<br>p) before device<br>configuration <sup>(22)</sup>          | —                                                            | —                                                    | —   | 1.6   | —                            | —   | 1.6   | —                            | —   | 1.6                      | V    |
| Maximum peak-<br>to-peak<br>differential input<br>voltage $V_{ID}$ (diff p-<br>p) after device<br>configuration <sup>(18)</sup> ,<br>(22) | $V_{CCR\_GXB} =$<br>1.0 V/1.05 V<br>( $V_{ICM} =$<br>0.70 V) | —                                                    | —   | 2.0   | —                            | —   | 2.0   | —                            | —   | 2.0                      | V    |
|                                                                                                                                           | $V_{CCR\_GXB} =$<br>0.90 V<br>( $V_{ICM} = 0.6$ V)           | —                                                    | —   | 2.4   | —                            | —   | 2.4   | —                            | —   | 2.4                      | V    |
|                                                                                                                                           | $V_{CCR\_GXB} =$<br>0.85 V<br>( $V_{ICM} = 0.6$ V)           | —                                                    | —   | 2.4   | —                            | —   | 2.4   | —                            | —   | 2.4                      | V    |
| Minimum<br>differential eye<br>opening at<br>receiver serial<br>input pins <sup>(6)</sup> , (22),<br>(27)                                 | —                                                            | 85                                                   | —   | —     | 85                           | —   | —     | 85                           | —   | —                        | mV   |

**Table 23. Transceiver Specifications for Stratix V GX and GS Devices <sup>(1)</sup> (Part 4 of 7)**

| Symbol/<br>Description                                     | Conditions                                              | Transceiver Speed<br>Grade 1 |           |     | Transceiver Speed<br>Grade 2 |           |     | Transceiver Speed<br>Grade 3 |           |     | Unit |
|------------------------------------------------------------|---------------------------------------------------------|------------------------------|-----------|-----|------------------------------|-----------|-----|------------------------------|-----------|-----|------|
|                                                            |                                                         | Min                          | Typ       | Max | Min                          | Typ       | Max | Min                          | Typ       | Max |      |
| Differential on-chip termination resistors <sup>(21)</sup> | 85-Ω setting                                            | —                            | 85 ± 30%  | —   | —                            | 85 ± 30%  | —   | —                            | 85 ± 30%  | —   | Ω    |
|                                                            | 100-Ω setting                                           | —                            | 100 ± 30% | —   | —                            | 100 ± 30% | —   | —                            | 100 ± 30% | —   | Ω    |
|                                                            | 120-Ω setting                                           | —                            | 120 ± 30% | —   | —                            | 120 ± 30% | —   | —                            | 120 ± 30% | —   | Ω    |
|                                                            | 150-Ω setting                                           | —                            | 150 ± 30% | —   | —                            | 150 ± 30% | —   | —                            | 150 ± 30% | —   | Ω    |
| V <sub>ICM</sub><br>(AC and DC coupled)                    | V <sub>CCR_GXB</sub> = 0.85 V or 0.9 V full bandwidth   | —                            | 600       | —   | —                            | 600       | —   | —                            | 600       | —   | mV   |
|                                                            | V <sub>CCR_GXB</sub> = 0.85 V or 0.9 V half bandwidth   | —                            | 600       | —   | —                            | 600       | —   | —                            | 600       | —   | mV   |
|                                                            | V <sub>CCR_GXB</sub> = 1.0 V/1.05 V full bandwidth      | —                            | 700       | —   | —                            | 700       | —   | —                            | 700       | —   | mV   |
|                                                            | V <sub>CCR_GXB</sub> = 1.0 V half bandwidth             | —                            | 750       | —   | —                            | 750       | —   | —                            | 750       | —   | mV   |
| t <sub>LTR</sub> <sup>(11)</sup>                           | —                                                       | —                            | —         | 10  | —                            | —         | 10  | —                            | —         | 10  | μs   |
| t <sub>LTD</sub> <sup>(12)</sup>                           | —                                                       | 4                            | —         | —   | 4                            | —         | —   | 4                            | —         | —   | μs   |
| t <sub>LTD_manual</sub> <sup>(13)</sup>                    | —                                                       | 4                            | —         | —   | 4                            | —         | —   | 4                            | —         | —   | μs   |
| t <sub>LTR_LTD_manual</sub> <sup>(14)</sup>                | —                                                       | 15                           | —         | —   | 15                           | —         | —   | 15                           | —         | —   | μs   |
| Run Length                                                 | —                                                       | —                            | —         | 200 | —                            | —         | 200 | —                            | —         | 200 | UI   |
| Programmable equalization (AC Gain) <sup>(10)</sup>        | Full bandwidth (6.25 GHz)<br>Half bandwidth (3.125 GHz) | —                            | —         | 16  | —                            | —         | 16  | —                            | —         | 16  | dB   |

**Table 23. Transceiver Specifications for Stratix V GX and GS Devices <sup>(1)</sup> (Part 5 of 7)**

| Symbol/<br>Description                                                | Conditions                                                 | Transceiver Speed<br>Grade 1 |                     |       | Transceiver Speed<br>Grade 2 |                     |       | Transceiver Speed<br>Grade 3 |                     |                                     | Unit     |
|-----------------------------------------------------------------------|------------------------------------------------------------|------------------------------|---------------------|-------|------------------------------|---------------------|-------|------------------------------|---------------------|-------------------------------------|----------|
|                                                                       |                                                            | Min                          | Typ                 | Max   | Min                          | Typ                 | Max   | Min                          | Typ                 | Max                                 |          |
| Programmable<br>DC gain                                               | DC Gain<br>Setting = 0                                     | —                            | 0                   | —     | —                            | 0                   | —     | —                            | 0                   | —                                   | dB       |
|                                                                       | DC Gain<br>Setting = 1                                     | —                            | 2                   | —     | —                            | 2                   | —     | —                            | 2                   | —                                   | dB       |
|                                                                       | DC Gain<br>Setting = 2                                     | —                            | 4                   | —     | —                            | 4                   | —     | —                            | 4                   | —                                   | dB       |
|                                                                       | DC Gain<br>Setting = 3                                     | —                            | 6                   | —     | —                            | 6                   | —     | —                            | 6                   | —                                   | dB       |
|                                                                       | DC Gain<br>Setting = 4                                     | —                            | 8                   | —     | —                            | 8                   | —     | —                            | 8                   | —                                   | dB       |
| <b>Transmitter</b>                                                    |                                                            |                              |                     |       |                              |                     |       |                              |                     |                                     |          |
| Supported I/O<br>Standards                                            | —                                                          | 1.4-V and 1.5-V PCML         |                     |       |                              |                     |       |                              |                     |                                     |          |
| Data rate<br>(Standard PCS)                                           | —                                                          | 600                          | —                   | 12200 | 600                          | —                   | 12200 | 600                          | —                   | 8500/<br>10312.5<br><sup>(24)</sup> | Mbps     |
| Data rate<br>(10G PCS)                                                | —                                                          | 600                          | —                   | 14100 | 600                          | —                   | 12500 | 600                          | —                   | 8500/<br>10312.5<br><sup>(24)</sup> | Mbps     |
| Differential on-<br>chip termination<br>resistors                     | 85- $\Omega$<br>setting                                    | —                            | 85 $\pm$<br>20%     | —     | —                            | 85 $\pm$<br>20%     | —     | —                            | 85 $\pm$<br>20%     | —                                   | $\Omega$ |
|                                                                       | 100- $\Omega$<br>setting                                   | —                            | 100<br>$\pm$<br>20% | —     | —                            | 100<br>$\pm$<br>20% | —     | —                            | 100<br>$\pm$<br>20% | —                                   | $\Omega$ |
|                                                                       | 120- $\Omega$<br>setting                                   | —                            | 120<br>$\pm$<br>20% | —     | —                            | 120<br>$\pm$<br>20% | —     | —                            | 120<br>$\pm$<br>20% | —                                   | $\Omega$ |
|                                                                       | 150- $\Omega$<br>setting                                   | —                            | 150<br>$\pm$<br>20% | —     | —                            | 150<br>$\pm$<br>20% | —     | —                            | 150<br>$\pm$<br>20% | —                                   | $\Omega$ |
| V <sub>OCM</sub> (AC<br>coupled)                                      | 0.65-V<br>setting                                          | —                            | 650                 | —     | —                            | 650                 | —     | —                            | 650                 | —                                   | mV       |
| V <sub>OCM</sub> (DC<br>coupled)                                      | —                                                          | —                            | 650                 | —     | —                            | 650                 | —     | —                            | 650                 | —                                   | mV       |
| Rise time <sup>(7)</sup>                                              | 20% to 80%                                                 | 30                           | —                   | 160   | 30                           | —                   | 160   | 30                           | —                   | 160                                 | ps       |
| Fall time <sup>(7)</sup>                                              | 80% to 20%                                                 | 30                           | —                   | 160   | 30                           | —                   | 160   | 30                           | —                   | 160                                 | ps       |
| Intra-differential<br>pair skew                                       | Tx V <sub>CM</sub> =<br>0.5 V and<br>slew rate of<br>15 ps | —                            | —                   | 15    | —                            | —                   | 15    | —                            | —                   | 15                                  | ps       |
| Intra-transceiver<br>block transmitter<br>channel-to-<br>channel skew | x6 PMA<br>bonded mode                                      | —                            | —                   | 120   | —                            | —                   | 120   | —                            | —                   | 120                                 | ps       |

**Table 28. Transceiver Specifications for Stratix V GT Devices (Part 2 of 5) <sup>(1)</sup>**

| Symbol/<br>Description                                                                                                                              | Conditions                                                                        | Transceiver<br>Speed Grade 2                         |               |        | Transceiver<br>Speed Grade 3 |               |        | Unit     |
|-----------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------|---------------|--------|------------------------------|---------------|--------|----------|
|                                                                                                                                                     |                                                                                   | Min                                                  | Typ           | Max    | Min                          | Typ           | Max    |          |
| Transmitter REFCLK<br>Phase Noise (622<br>MHz) <sup>(18)</sup>                                                                                      | 100 Hz                                                                            | —                                                    | —             | -70    | —                            | —             | -70    | dBc/Hz   |
|                                                                                                                                                     | 1 kHz                                                                             | —                                                    | —             | -90    | —                            | —             | -90    |          |
|                                                                                                                                                     | 10 kHz                                                                            | —                                                    | —             | -100   | —                            | —             | -100   |          |
|                                                                                                                                                     | 100 kHz                                                                           | —                                                    | —             | -110   | —                            | —             | -110   |          |
|                                                                                                                                                     | ≥ 1 MHz                                                                           | —                                                    | —             | -120   | —                            | —             | -120   |          |
| Transmitter REFCLK<br>Phase Jitter (100<br>MHz) <sup>(15)</sup>                                                                                     | 10 kHz to<br>1.5 MHz<br>(PCIe)                                                    | —                                                    | —             | 3      | —                            | —             | 3      | ps (rms) |
| RREF <sup>(17)</sup>                                                                                                                                | —                                                                                 | —                                                    | 1800<br>± 1%  | —      | —                            | 1800<br>± 1%  | —      | Ω        |
| <b>Transceiver Clocks</b>                                                                                                                           |                                                                                   |                                                      |               |        |                              |               |        |          |
| fixedclk clock<br>frequency                                                                                                                         | PCIe<br>Receiver<br>Detect                                                        | —                                                    | 100 or<br>125 | —      | —                            | 100 or<br>125 | —      | MHz      |
| Reconfiguration clock<br>(mgmt_clk_clk)<br>frequency                                                                                                | —                                                                                 | 100                                                  | —             | 125    | 100                          | —             | 125    | MHz      |
| <b>Receiver</b>                                                                                                                                     |                                                                                   |                                                      |               |        |                              |               |        |          |
| Supported I/O<br>Standards                                                                                                                          | —                                                                                 | 1.4-V PCML, 1.5-V PCML, 2.5-V PCML, LVPECL, and LVDS |               |        |                              |               |        |          |
| Data rate<br>(Standard PCS) <sup>(21)</sup>                                                                                                         | GX channels                                                                       | 600                                                  | —             | 8500   | 600                          | —             | 8500   | Mbps     |
| Data rate<br>(10G PCS) <sup>(21)</sup>                                                                                                              | GX channels                                                                       | 600                                                  | —             | 12,500 | 600                          | —             | 12,500 | Mbps     |
| Data rate                                                                                                                                           | GT channels                                                                       | 19,600                                               | —             | 28,050 | 19,600                       | —             | 25,780 | Mbps     |
| Absolute V <sub>MAX</sub> for a<br>receiver pin <sup>(3)</sup>                                                                                      | GT channels                                                                       | —                                                    | —             | 1.2    | —                            | —             | 1.2    | V        |
| Absolute V <sub>MIN</sub> for a<br>receiver pin                                                                                                     | GT channels                                                                       | -0.4                                                 | —             | —      | -0.4                         | —             | —      | V        |
| Maximum peak-to-peak<br>differential input<br>voltage V <sub>ID</sub> (diff p-p)<br>before device<br>configuration <sup>(20)</sup>                  | GT channels                                                                       | —                                                    | —             | 1.6    | —                            | —             | 1.6    | V        |
|                                                                                                                                                     | GX channels                                                                       | <sup>(8)</sup>                                       |               |        |                              |               |        |          |
| Maximum peak-to-peak<br>differential input<br>voltage V <sub>ID</sub> (diff p-p)<br>after device<br>configuration <sup>(16)</sup> , <sup>(20)</sup> | GT channels<br>V <sub>CCR_GTB</sub> =<br>1.05 V<br>(V <sub>ICM</sub> =<br>0.65 V) | —                                                    | —             | 2.2    | —                            | —             | 2.2    | V        |
|                                                                                                                                                     | GX channels                                                                       | <sup>(8)</sup>                                       |               |        |                              |               |        |          |
| Minimum differential<br>eye opening at receiver<br>serial input pins <sup>(4)</sup> , <sup>(20)</sup>                                               | GT channels                                                                       | 200                                                  | —             | —      | 200                          | —             | —      | mV       |
|                                                                                                                                                     | GX channels                                                                       | <sup>(8)</sup>                                       |               |        |                              |               |        |          |

Figure 6 shows the Stratix V DC gain curves for GT channels.

---

**Figure 6. DC Gain Curves for GT Channels**

---

---

**Transceiver Characterization**

This section summarizes the Stratix V transceiver characterization results for compliance with the following protocols:

- Interlaken
- 40G (XLAUI)/100G (CAUI)
- 10GBase-KR
- QSGMII
- XAUI
- SFI
- Gigabit Ethernet (Gbe / GIGE)
- SPAUI
- Serial Rapid IO (SRIO)
- CPRI
- OBSAI
- Hyper Transport (HT)
- SATA
- SAS
- CEI

**Table 31. PLL Specifications for Stratix V Devices (Part 2 of 3)**

| Symbol                                             | Parameter                                                                                                    | Min  | Typ     | Max                                          | Unit      |
|----------------------------------------------------|--------------------------------------------------------------------------------------------------------------|------|---------|----------------------------------------------|-----------|
| $t_{\text{INCCJ}}$ <sup>(3), (4)</sup>             | Input clock cycle-to-cycle jitter ( $f_{\text{REF}} \geq 100$ MHz)                                           | —    | —       | 0.15                                         | UI (p-p)  |
|                                                    | Input clock cycle-to-cycle jitter ( $f_{\text{REF}} < 100$ MHz)                                              | −750 | —       | +750                                         | ps (p-p)  |
| $t_{\text{OUTPJ\_DC}}$ <sup>(5)</sup>              | Period Jitter for dedicated clock output ( $f_{\text{OUT}} \geq 100$ MHz)                                    | —    | —       | 175 <sup>(1)</sup>                           | ps (p-p)  |
|                                                    | Period Jitter for dedicated clock output ( $f_{\text{OUT}} < 100$ MHz)                                       | —    | —       | 17.5 <sup>(1)</sup>                          | mUI (p-p) |
| $t_{\text{FOUTPJ\_DC}}$ <sup>(5)</sup>             | Period Jitter for dedicated clock output in fractional PLL ( $f_{\text{OUT}} \geq 100$ MHz)                  | —    | —       | 250 <sup>(11)</sup> ,<br>175 <sup>(12)</sup> | ps (p-p)  |
|                                                    | Period Jitter for dedicated clock output in fractional PLL ( $f_{\text{OUT}} < 100$ MHz)                     | —    | —       | 25 <sup>(11)</sup> ,<br>17.5 <sup>(12)</sup> | mUI (p-p) |
| $t_{\text{OUTCCJ\_DC}}$ <sup>(5)</sup>             | Cycle-to-Cycle Jitter for a dedicated clock output ( $f_{\text{OUT}} \geq 100$ MHz)                          | —    | —       | 175                                          | ps (p-p)  |
|                                                    | Cycle-to-Cycle Jitter for a dedicated clock output ( $f_{\text{OUT}} < 100$ MHz)                             | —    | —       | 17.5                                         | mUI (p-p) |
| $t_{\text{FOUTCCJ\_DC}}$ <sup>(5)</sup>            | Cycle-to-cycle Jitter for a dedicated clock output in fractional PLL ( $f_{\text{OUT}} \geq 100$ MHz)        | —    | —       | 250 <sup>(11)</sup> ,<br>175 <sup>(12)</sup> | ps (p-p)  |
|                                                    | Cycle-to-cycle Jitter for a dedicated clock output in fractional PLL ( $f_{\text{OUT}} < 100$ MHz)+          | —    | —       | 25 <sup>(11)</sup> ,<br>17.5 <sup>(12)</sup> | mUI (p-p) |
| $t_{\text{OUTPJ\_IO}}$ <sup>(5), (8)</sup>         | Period Jitter for a clock output on a regular I/O in integer PLL ( $f_{\text{OUT}} \geq 100$ MHz)            | —    | —       | 600                                          | ps (p-p)  |
|                                                    | Period Jitter for a clock output on a regular I/O ( $f_{\text{OUT}} < 100$ MHz)                              | —    | —       | 60                                           | mUI (p-p) |
| $t_{\text{FOUTPJ\_IO}}$ <sup>(5), (8), (11)</sup>  | Period Jitter for a clock output on a regular I/O in fractional PLL ( $f_{\text{OUT}} \geq 100$ MHz)         | —    | —       | 600 <sup>(10)</sup>                          | ps (p-p)  |
|                                                    | Period Jitter for a clock output on a regular I/O in fractional PLL ( $f_{\text{OUT}} < 100$ MHz)            | —    | —       | 60 <sup>(10)</sup>                           | mUI (p-p) |
| $t_{\text{OUTCCJ\_IO}}$ <sup>(5), (8)</sup>        | Cycle-to-cycle Jitter for a clock output on a regular I/O in integer PLL ( $f_{\text{OUT}} \geq 100$ MHz)    | —    | —       | 600                                          | ps (p-p)  |
|                                                    | Cycle-to-cycle Jitter for a clock output on a regular I/O in integer PLL ( $f_{\text{OUT}} < 100$ MHz)       | —    | —       | 60 <sup>(10)</sup>                           | mUI (p-p) |
| $t_{\text{FOUTCCJ\_IO}}$ <sup>(5), (8), (11)</sup> | Cycle-to-cycle Jitter for a clock output on a regular I/O in fractional PLL ( $f_{\text{OUT}} \geq 100$ MHz) | —    | —       | 600 <sup>(10)</sup>                          | ps (p-p)  |
|                                                    | Cycle-to-cycle Jitter for a clock output on a regular I/O in fractional PLL ( $f_{\text{OUT}} < 100$ MHz)    | —    | —       | 60                                           | mUI (p-p) |
| $t_{\text{CASC\_OUTPJ\_DC}}$ <sup>(5), (6)</sup>   | Period Jitter for a dedicated clock output in cascaded PLLs ( $f_{\text{OUT}} \geq 100$ MHz)                 | —    | —       | 175                                          | ps (p-p)  |
|                                                    | Period Jitter for a dedicated clock output in cascaded PLLs ( $f_{\text{OUT}} < 100$ MHz)                    | —    | —       | 17.5                                         | mUI (p-p) |
| $f_{\text{DRIFT}}$                                 | Frequency drift after PFDENA is disabled for a duration of 100 $\mu$ s                                       | —    | —       | $\pm 10$                                     | %         |
| $dK_{\text{BIT}}$                                  | Bit number of Delta Sigma Modulator (DSM)                                                                    | 8    | 24      | 32                                           | Bits      |
| $K_{\text{VALUE}}$                                 | Numerator of Fraction                                                                                        | 128  | 8388608 | 2147483648                                   | —         |

## Periphery Performance

This section describes periphery performance, including high-speed I/O and external memory interface.

I/O performance supports several system interfaces, such as the **LVDS** high-speed I/O interface, external memory interface, and the **PCI/PCI-X** bus interface.

General-purpose I/O standards such as 3.3-, 2.5-, 1.8-, and 1.5-**LVTTL/LVCMOS** are capable of a typical 167 MHz and 1.2-**LVCMOS** at 100 MHz interfacing frequency with a 10 pF load.



The actual achievable frequency depends on design- and system-specific factors. Ensure proper timing closure in your design and perform HSPICE/IBIS simulations based on your specific design and system setup to determine the maximum achievable frequency in your system.

### High-Speed I/O Specification

Table 36 lists high-speed I/O timing for Stratix V devices.

**Table 36. High-Speed I/O Specifications for Stratix V Devices <sup>(1)</sup>, <sup>(2)</sup> (Part 1 of 4)**

| Symbol                                                                                     | Conditions                                         | C1  |     |     | C2, C2L, I2, I2L |     |     | C3, I3, I3L, I3YY |     |                    | C4,I4 |     |                    | Unit |
|--------------------------------------------------------------------------------------------|----------------------------------------------------|-----|-----|-----|------------------|-----|-----|-------------------|-----|--------------------|-------|-----|--------------------|------|
|                                                                                            |                                                    | Min | Typ | Max | Min              | Typ | Max | Min               | Typ | Max                | Min   | Typ | Max                |      |
| $f_{\text{HCLK\_in}}$ (input clock frequency)<br>True Differential I/O Standards           | Clock boost factor<br>$W = 1$ to 40 <sup>(4)</sup> | 5   | —   | 800 | 5                | —   | 800 | 5                 | —   | 625                | 5     | —   | 525                | MHz  |
| $f_{\text{HCLK\_in}}$ (input clock frequency)<br>Single Ended I/O Standards <sup>(3)</sup> | Clock boost factor<br>$W = 1$ to 40 <sup>(4)</sup> | 5   | —   | 800 | 5                | —   | 800 | 5                 | —   | 625                | 5     | —   | 525                | MHz  |
| $f_{\text{HCLK\_in}}$ (input clock frequency)<br>Single Ended I/O Standards                | Clock boost factor<br>$W = 1$ to 40 <sup>(4)</sup> | 5   | —   | 520 | 5                | —   | 520 | 5                 | —   | 420                | 5     | —   | 420                | MHz  |
| $f_{\text{HCLK\_OUT}}$<br>(output clock frequency)                                         | —                                                  | 5   | —   | 800 | 5                | —   | 800 | 5                 | —   | 625 <sup>(5)</sup> | 5     | —   | 525 <sup>(5)</sup> | MHz  |

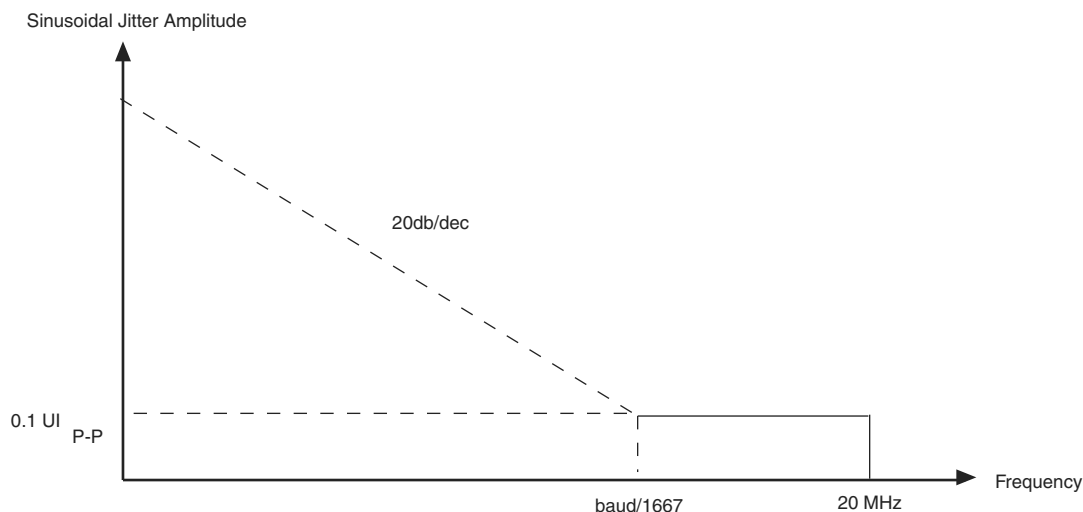
**Table 36. High-Speed I/O Specifications for Stratix V Devices <sup>(1)</sup>, <sup>(2)</sup> (Part 3 of 4)**

| Symbol                                                     | Conditions                                                                                                                          | C1             |     |                | C2, C2L, I2, I2L |     |                | C3, I3, I3L, I3YY |     |                | C4, I4         |     |                | Unit |
|------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------|----------------|-----|----------------|------------------|-----|----------------|-------------------|-----|----------------|----------------|-----|----------------|------|
|                                                            |                                                                                                                                     | Min            | Typ | Max            | Min              | Typ | Max            | Min               | Typ | Max            | Min            | Typ | Max            |      |
| $t_{DUTY}$                                                 | Transmitter output clock duty cycle for both True and Emulated Differential I/O Standards                                           | 45             | 50  | 55             | 45               | 50  | 55             | 45                | 50  | 55             | 45             | 50  | 55             | %    |
| $t_{RISE}$ & $t_{FALL}$                                    | True Differential I/O Standards                                                                                                     | —              | —   | 160            | —                | —   | 160            | —                 | —   | 200            | —              | —   | 200            | ps   |
|                                                            | Emulated Differential I/O Standards with three external output resistor networks                                                    | —              | —   | 250            | —                | —   | 250            | —                 | —   | 250            | —              | —   | 300            | ps   |
| TCCS                                                       | True Differential I/O Standards                                                                                                     | —              | —   | 150            | —                | —   | 150            | —                 | —   | 150            | —              | —   | 150            | ps   |
|                                                            | Emulated Differential I/O Standards                                                                                                 | —              | —   | 300            | —                | —   | 300            | —                 | —   | 300            | —              | —   | 300            | ps   |
| <b>Receiver</b>                                            |                                                                                                                                     |                |     |                |                  |     |                |                   |     |                |                |     |                |      |
| True Differential I/O Standards - $f_{HSDRDP}$ (data rate) | SERDES factor J = 3 to 10 <sup>(11)</sup> , <sup>(12)</sup> , <sup>(13)</sup> , <sup>(14)</sup> , <sup>(15)</sup> , <sup>(16)</sup> | 150            | —   | 1434           | 150              | —   | 1434           | 150               | —   | 1250           | 150            | —   | 1050           | Mbps |
|                                                            | SERDES factor J $\geq 4$                                                                                                            | 150            | —   | 1600           | 150              | —   | 1600           | 150               | —   | 1600           | 150            | —   | 1250           | Mbps |
|                                                            | LVDS RX with DPA <sup>(12)</sup> , <sup>(14)</sup> , <sup>(15)</sup> , <sup>(16)</sup>                                              | 150            | —   | 1600           | 150              | —   | 1600           | 150               | —   | 1600           | 150            | —   | 1250           | Mbps |
|                                                            | SERDES factor J = 2, uses DDR Registers                                                                                             | <sup>(6)</sup> | —   | <sup>(7)</sup> | <sup>(6)</sup>   | —   | <sup>(7)</sup> | <sup>(6)</sup>    | —   | <sup>(7)</sup> | <sup>(6)</sup> | —   | <sup>(7)</sup> | Mbps |
|                                                            | SERDES factor J = 1, uses SDR Register                                                                                              | <sup>(6)</sup> | —   | <sup>(7)</sup> | <sup>(6)</sup>   | —   | <sup>(7)</sup> | <sup>(6)</sup>    | —   | <sup>(7)</sup> | <sup>(6)</sup> | —   | <sup>(7)</sup> | Mbps |

**Table 38. LVDS Soft-CDR/DPA Sinusoidal Jitter Mask Values for a Data Rate  $\geq 1.25$  Gbps**

| Jitter Frequency (Hz) |            | Sinusoidal Jitter (UI) |
|-----------------------|------------|------------------------|
| F1                    | 10,000     | 25.000                 |
| F2                    | 17,565     | 25.000                 |
| F3                    | 1,493,000  | 0.350                  |
| F4                    | 50,000,000 | 0.350                  |

Figure 9 shows the LVDS soft-CDR/DPA sinusoidal jitter tolerance specification for a data rate  $< 1.25$  Gbps.

**Figure 9. LVDS Soft-CDR/DPA Sinusoidal Jitter Tolerance Specification for a Data Rate  $< 1.25$  Gbps**

### DLL Range, DQS Logic Block, and Memory Output Clock Jitter Specifications

Table 39 lists the DLL range specification for Stratix V devices. The DLL is always in 8-tap mode in Stratix V devices.

**Table 39. DLL Range Specifications for Stratix V Devices <sup>(1)</sup>**

| C1      | C2, C2L, I2, I2L | C3, I3, I3L, I3YY | C4,I4   | Unit |
|---------|------------------|-------------------|---------|------|
| 300-933 | 300-933          | 300-890           | 300-890 | MHz  |

**Note to Table 39:**

- (1) Stratix V devices support memory interface frequencies lower than 300 MHz, although the reference clock that feeds the DLL must be at least 300 MHz. To support interfaces below 300 MHz, multiply the reference clock feeding the DLL to ensure the frequency is within the supported range of the DLL.

Table 40 lists the DQS phase offset delay per stage for Stratix V devices.

**Table 40. DQS Phase Offset Delay Per Setting for Stratix V Devices <sup>(1), (2)</sup> (Part 1 of 2)**

| Speed Grade      | Min | Max | Unit |
|------------------|-----|-----|------|
| C1               | 8   | 14  | ps   |
| C2, C2L, I2, I2L | 8   | 14  | ps   |
| C3,I3, I3L, I3YY | 8   | 15  | ps   |

## Duty Cycle Distortion (DCD) Specifications

Table 44 lists the worst-case DCD for Stratix V devices.

**Table 44. Worst-Case DCD on Stratix V I/O Pins <sup>(1)</sup>**

| Symbol            | C1  |     | C2, C2L, I2, I2L |     | C3, I3, I3L, I3YY |     | C4, I4 |     | Unit |
|-------------------|-----|-----|------------------|-----|-------------------|-----|--------|-----|------|
|                   | Min | Max | Min              | Max | Min               | Max | Min    | Max |      |
| Output Duty Cycle | 45  | 55  | 45               | 55  | 45                | 55  | 45     | 55  | %    |

**Note to Table 44:**

(1) The DCD numbers do not cover the core clock network.

## Configuration Specification

### POR Delay Specification

Power-on reset (POR) delay is defined as the delay between the time when all the power supplies monitored by the POR circuitry reach the minimum recommended operating voltage to the time when the nSTATUS is released high and your device is ready to begin configuration.



For more information about the POR delay, refer to the *Hot Socketing and Power-On Reset in Stratix V Devices* chapter.

Table 45 lists the fast and standard POR delay specification.

**Table 45. Fast and Standard POR Delay Specification <sup>(1)</sup>**

| POR Delay | Minimum | Maximum |
|-----------|---------|---------|
| Fast      | 4 ms    | 12 ms   |
| Standard  | 100 ms  | 300 ms  |

**Note to Table 45:**

(1) You can select the POR delay based on the MSEL settings as described in the MSEL Pin Settings section of the “Configuration, Design Security, and Remote System Upgrades in Stratix V Devices” chapter.

### JTAG Configuration Specifications

Table 46 lists the JTAG timing parameters and values for Stratix V devices.

**Table 46. JTAG Timing Parameters and Values for Stratix V Devices**

| Symbol                  | Description                        | Min | Max | Unit |
|-------------------------|------------------------------------|-----|-----|------|
| t <sub>JCP</sub>        | TCK clock period <sup>(2)</sup>    | 30  | —   | ns   |
| t <sub>JCP</sub>        | TCK clock period <sup>(2)</sup>    | 167 | —   | ns   |
| t <sub>JCH</sub>        | TCK clock high time <sup>(2)</sup> | 14  | —   | ns   |
| t <sub>JCL</sub>        | TCK clock low time <sup>(2)</sup>  | 14  | —   | ns   |
| t <sub>JPSU (TDI)</sub> | TDI JTAG port setup time           | 2   | —   | ns   |
| t <sub>JPSU (TMS)</sub> | TMS JTAG port setup time           | 3   | —   | ns   |

**Table 47. Uncompressed .rbf Sizes for Stratix V Devices**

| Family                     | Device | Package | Configuration .rbf Size (bits) | IOCSR .rbf Size (bits) <sup>(4), (5)</sup> |
|----------------------------|--------|---------|--------------------------------|--------------------------------------------|
| Stratix V E <sup>(1)</sup> | 5SEE9  | —       | 342,742,976                    | 700,888                                    |
|                            | 5SEEB  | —       | 342,742,976                    | 700,888                                    |

**Notes to Table 47:**

- (1) Stratix V E devices do not have PCI Express® (PCIe®) hard IP. Stratix V E devices do not support the CvP configuration scheme.
- (2) 36-transceiver devices.
- (3) 24-transceiver devices.
- (4) File size for the periphery image.
- (5) The IOCSR .rbf size is specifically for the CvP feature.

Use the data in Table 47 to estimate the file size before design compilation. Different configuration file formats, such as a hexadecimal (.hex) or tabular text file (.tff) format, have different file sizes. For the different types of configuration file and file sizes, refer to the Quartus II software. However, for a specific version of the Quartus II software, any design targeted for the same device has the same uncompressed configuration file size. If you are using compression, the file size can vary after each compilation because the compression ratio depends on your design.



For more information about setting device configuration options, refer to *Configuration, Design Security, and Remote System Upgrades in Stratix V Devices*. For creating configuration files, refer to the *Quartus II Help*.

Table 48 lists the minimum configuration time estimates for Stratix V devices.

**Table 48. Minimum Configuration Time Estimation for Stratix V Devices**

| Variant | Member Code | Active Serial <sup>(1)</sup> |            |                     | Fast Passive Parallel <sup>(2)</sup> |            |                     |
|---------|-------------|------------------------------|------------|---------------------|--------------------------------------|------------|---------------------|
|         |             | Width                        | DCLK (MHz) | Min Config Time (s) | Width                                | DCLK (MHz) | Min Config Time (s) |
| GX      | A3          | 4                            | 100        | 0.534               | 32                                   | 100        | 0.067               |
|         |             | 4                            | 100        | 0.344               | 32                                   | 100        | 0.043               |
|         | A4          | 4                            | 100        | 0.534               | 32                                   | 100        | 0.067               |
|         | A5          | 4                            | 100        | 0.675               | 32                                   | 100        | 0.084               |
|         | A7          | 4                            | 100        | 0.675               | 32                                   | 100        | 0.084               |
|         | A9          | 4                            | 100        | 0.857               | 32                                   | 100        | 0.107               |
|         | AB          | 4                            | 100        | 0.857               | 32                                   | 100        | 0.107               |
|         | B5          | 4                            | 100        | 0.676               | 32                                   | 100        | 0.085               |
|         | B6          | 4                            | 100        | 0.676               | 32                                   | 100        | 0.085               |
|         | B9          | 4                            | 100        | 0.857               | 32                                   | 100        | 0.107               |
|         | BB          | 4                            | 100        | 0.857               | 32                                   | 100        | 0.107               |
| GT      | C5          | 4                            | 100        | 0.675               | 32                                   | 100        | 0.084               |
|         | C7          | 4                            | 100        | 0.675               | 32                                   | 100        | 0.084               |

**Table 49. DCLK-to-DATA[] Ratio <sup>(1)</sup> (Part 2 of 2)**

| Configuration Scheme | Decompression | Design Security | DCLK-to-DATA[] Ratio |
|----------------------|---------------|-----------------|----------------------|
| FPP ×32              | Disabled      | Disabled        | 1                    |
|                      | Disabled      | Enabled         | 4                    |
|                      | Enabled       | Disabled        | 8                    |
|                      | Enabled       | Enabled         | 8                    |

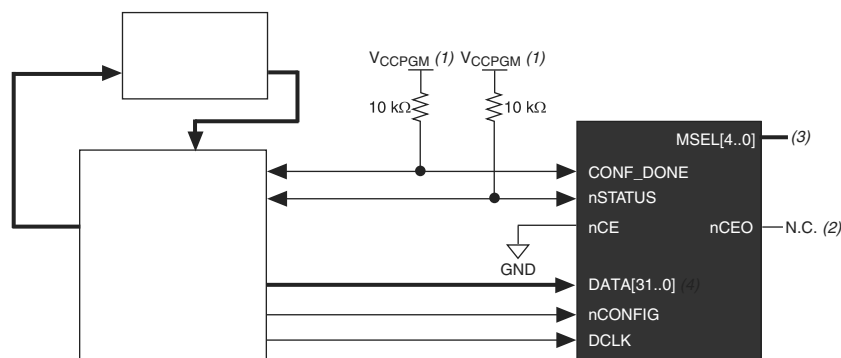
**Note to Table 49:**

- (1) Depending on the DCLK-to-DATA[] ratio, the host must send a DCLK frequency that is r times the data rate in bytes per second (Bps), or words per second (Wps). For example, in FPP ×16 when the DCLK-to-DATA[] ratio is 2, the DCLK frequency must be 2 times the data rate in Wps. Stratix V devices use the additional clock cycles to decrypt and decompress the configuration data.

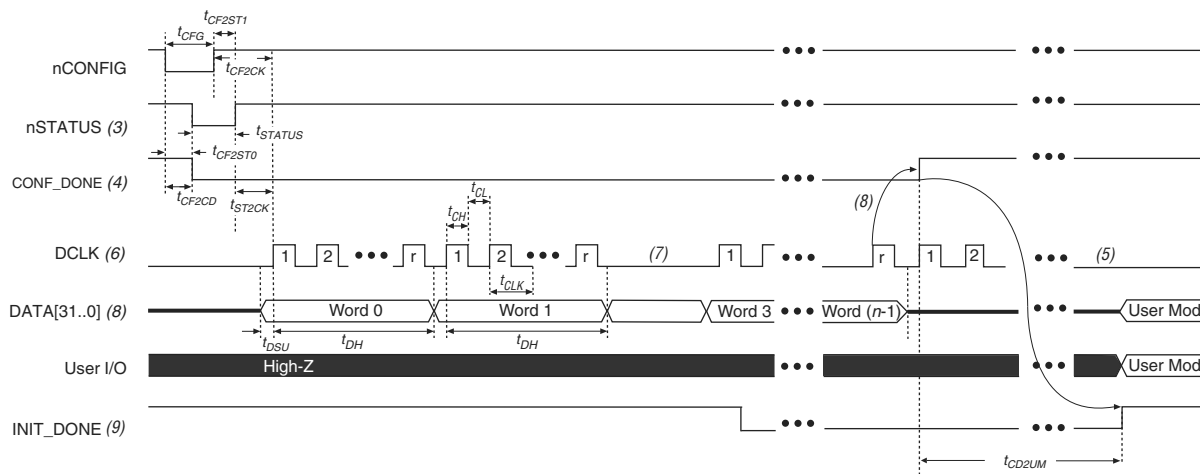


If the DCLK-to-DATA[] ratio is greater than 1, at the end of configuration, you can only stop the DCLK (DCLK-to-DATA[] ratio – 1) clock cycles after the last data is latched into the Stratix V device.

Figure 11 shows the configuration interface connections between the Stratix V device and a MAX II or MAX V device for single device configuration.

**Figure 11. Single Device FPP Configuration Using an External Host****Notes to Figure 11:**

- (1) Connect the resistor to a supply that provides an acceptable input signal for the Stratix V device.  $V_{CCPGM}$  must be high enough to meet the  $V_{IH}$  specification of the I/O on the device and the external host. Altera recommends powering up all configuration system I/Os with  $V_{CCPGM}$ .
- (2) You can leave the nCEO pin unconnected or use it as a user I/O pin when it does not feed another device's nCE pin.
- (3) The MSEL pin settings vary for different data width, configuration voltage standards, and POR delay. To connect MSEL, refer to the MSEL Pin Settings section of the "Configuration, Design Security, and Remote System Upgrades in Stratix V Devices" chapter.
- (4) If you use FPP ×8, use DATA[7..0]. If you use FPP ×16, use DATA[15..0].

**Figure 13. FPP Configuration Timing Waveform When the DCLK-to-DATA[] Ratio is >1 (1), (2)****Notes to Figure 13:**

- (1) Use this timing waveform and parameters when the DCLK-to-DATA [] ratio is >1. To find out the DCLK-to-DATA [] ratio for your system, refer to Table 49 on page 55.
- (2) The beginning of this waveform shows the device in user mode. In user mode, nCONFIG, nSTATUS, and CONF\_DONE are at logic high levels. When nCONFIG is pulled low, a reconfiguration cycle begins.
- (3) After power-up, the Stratix V device holds nSTATUS low for the time as specified by the POR delay.
- (4) After power-up, before and during configuration, CONF\_DONE is low.
- (5) Do not leave DCLK floating after configuration. You can drive it high or low, whichever is more convenient.
- (6) "r" denotes the DCLK-to-DATA [] ratio. For the DCLK-to-DATA [] ratio based on the decompression and the design security feature enable settings, refer to Table 49 on page 55.
- (7) If needed, pause DCLK by holding it low. When DCLK restarts, the external host must provide data on the DATA [31 . . 0] pins prior to sending the first DCLK rising edge.
- (8) To ensure a successful configuration, send the entire configuration data to the Stratix V device. CONF\_DONE is released high after the Stratix V device receives all the configuration data successfully. After CONF\_DONE goes high, send two additional falling edges on DCLK to begin initialization and enter user mode.
- (9) After the option bit to enable the INIT\_DONE pin is configured into the device, the INIT\_DONE goes low.

## Active Serial Configuration Timing

Table 52 lists the DCLK frequency specification in the AS configuration scheme.

**Table 52. DCLK Frequency Specification in the AS Configuration Scheme <sup>(1), (2)</sup>**

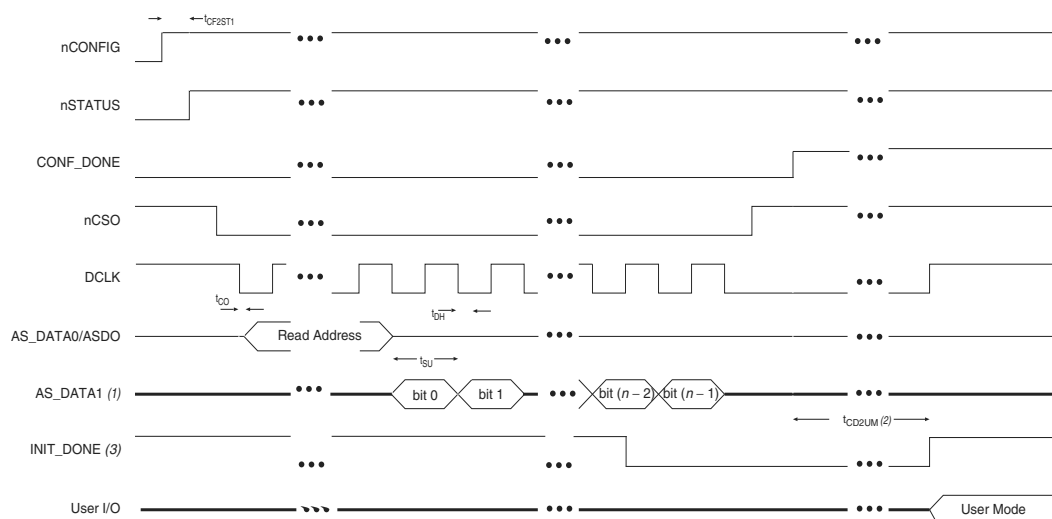
| Minimum | Typical | Maximum | Unit |
|---------|---------|---------|------|
| 5.3     | 7.9     | 12.5    | MHz  |
| 10.6    | 15.7    | 25.0    | MHz  |
| 21.3    | 31.4    | 50.0    | MHz  |
| 42.6    | 62.9    | 100.0   | MHz  |

**Notes to Table 52:**

- (1) This applies to the DCLK frequency specification when using the internal oscillator as the configuration clock source.
- (2) The AS multi-device configuration scheme does not support DCLK frequency of 100 MHz.

Figure 14 shows the single-device configuration setup for an AS ×1 mode.

**Figure 14. AS Configuration Timing**



**Notes to Figure 14:**

- (1) If you are using AS ×4 mode, this signal represents the AS\_DATA [3 : 0] and EPCQ sends in 4-bits of data for each DCLK cycle.
- (2) The initialization clock can be from internal oscillator or CLKUSR pin.
- (3) After the option bit to enable the INIT\_DONE pin is configured into the device, the INIT\_DONE goes low.

Table 53 lists the timing parameters for AS ×1 and AS ×4 configurations in Stratix V devices.

**Table 53. AS Timing Parameters for AS ×1 and AS ×4 Configurations in Stratix V Devices <sup>(1), (2)</sup> (Part 1 of 2)**

| Symbol          | Parameter                                   | Minimum | Maximum | Units |
|-----------------|---------------------------------------------|---------|---------|-------|
| t <sub>CO</sub> | DCLK falling edge to AS_DATA0/ASDO output   | —       | 2       | ns    |
| t <sub>SU</sub> | Data setup time before falling edge on DCLK | 1.5     | —       | ns    |
| t <sub>H</sub>  | Data hold time after falling edge on DCLK   | 0       | —       | ns    |

**Table 61. Document Revision History (Part 2 of 3)**

| Date          | Version | Changes                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|---------------|---------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| November 2014 | 3.3     | <ul style="list-style-type: none"> <li>■ Added the I3YY speed grade and changed the data rates for the GX channel in Table 1.</li> <li>■ Added the I3YY speed grade to the <math>V_{CC}</math> description in Table 6.</li> <li>■ Added the I3YY speed grade to <math>V_{CCHIP\_L}</math>, <math>V_{CCHIP\_R}</math>, <math>V_{CCHSSI\_L}</math>, and <math>V_{CCHSSI\_R}</math> descriptions in Table 7.</li> <li>■ Added 240-<math>\Omega</math> to Table 11.</li> <li>■ Changed CDR PPM tolerance in Table 23.</li> <li>■ Added additional max data rate for fPLL in Table 23.</li> <li>■ Added the I3YY speed grade and changed the data rates for transceiver speed grade 3 in Table 25.</li> <li>■ Added the I3YY speed grade and changed the data rates for transceiver speed grade 3 in Table 26.</li> <li>■ Changed CDR PPM tolerance in Table 28.</li> <li>■ Added additional max data rate for fPLL in Table 28.</li> <li>■ Changed the mode descriptions for MLAB and M20K in Table 33.</li> <li>■ Changed the Max value of <math>f_{HCLK\_OUT}</math> for the C2, C2L, I2, I2L speed grades in Table 36.</li> <li>■ Changed the frequency ranges for C1 and C2 in Table 39.</li> <li>■ Changed the .rbf file sizes for 5SGSD6 and 5SGSD8 in Table 47.</li> <li>■ Added note about nSTATUS to Table 50, Table 51, Table 54.</li> <li>■ Changed the available settings in Table 58.</li> <li>■ Changed the note in “Periphery Performance”.</li> <li>■ Updated the “I/O Standard Specifications” section.</li> <li>■ Updated the “Raw Binary File Size” section.</li> <li>■ Updated the receiver voltage input range in Table 22.</li> <li>■ Updated the max frequency for the LVDS clock network in Table 36.</li> <li>■ Updated the DCLK note to Figure 11.</li> <li>■ Updated Table 23 <math>VO_{CM}</math> (DC Coupled) condition.</li> <li>■ Updated Table 6 and Table 7.</li> <li>■ Added the DCLK specification to Table 55.</li> <li>■ Updated the notes for Table 47.</li> <li>■ Updated the list of parameters for Table 56.</li> </ul> |
| November 2013 | 3.2     | ■ Updated Table 28                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| November 2013 | 3.1     | ■ Updated Table 33                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| November 2013 | 3.0     | ■ Updated Table 23 and Table 28                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| October 2013  | 2.9     | ■ Updated the “Transceiver Characterization” section                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| October 2013  | 2.8     | <ul style="list-style-type: none"> <li>■ Updated Table 3, Table 12, Table 14, Table 19, Table 20, Table 23, Table 24, Table 28, Table 30, Table 31, Table 32, Table 33, Table 36, Table 39, Table 40, Table 41, Table 42, Table 47, Table 53, Table 58, and Table 59</li> <li>■ Added Figure 1 and Figure 3</li> <li>■ Added the “Transceiver Characterization” section</li> <li>■ Removed all “Preliminary” designations.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |