



Welcome to [E-XFL.COM](https://www.e-xfl.com)

### Understanding [Embedded - FPGAs \(Field Programmable Gate Array\)](#)

Embedded - FPGAs, or Field Programmable Gate Arrays, are advanced integrated circuits that offer unparalleled flexibility and performance for digital systems. Unlike traditional fixed-function logic devices, FPGAs can be programmed and reprogrammed to execute a wide array of logical operations, enabling customized functionality tailored to specific applications. This reprogrammability allows developers to iterate designs quickly and implement complex functions without the need for custom hardware.

### Applications of Embedded - FPGAs

The versatility of Embedded - FPGAs makes them indispensable in numerous fields. In telecommunications.

#### Details

|                                |   |
|--------------------------------|---|
| Product Status                 | Obsolete  |
| Number of LABs/CLBs            | 158500  |
| Number of Logic Elements/Cells | 420000  |
| Total RAM Bits                 | 37888000  |
| Number of I/O                  | 600   |
| Number of Gates                | -   |
| Voltage - Supply               | 0.87V ~ 0.93V   |
| Mounting Type                  | Surface Mount   |
| Operating Temperature          | 0°C ~ 85°C (TJ)   |
| Package / Case                 | 1152-BBGA, FCBGA  |
| Supplier Device Package        | 1152-FBGA (35x35)   |
| Purchase URL                   | <a href="https://www.e-xfl.com/product-detail/intel/5sgxma4k3f35c2n">https://www.e-xfl.com/product-detail/intel/5sgxma4k3f35c2n</a> |

**Table 1. Stratix V GX and GS Commercial and Industrial Speed Grade Offering <sup>(1), (2), (3)</sup> (Part 2 of 2)**

| Transceiver Speed Grade  | Core Speed Grade |         |     |     |         |         |                    |     |
|--------------------------|------------------|---------|-----|-----|---------|---------|--------------------|-----|
|                          | C1               | C2, C2L | C3  | C4  | I2, I2L | I3, I3L | I3YY               | I4  |
| 3<br>GX channel—8.5 Gbps | —                | Yes     | Yes | Yes | —       | Yes     | Yes <sup>(4)</sup> | Yes |

**Notes to Table 1:**

- (1) C = Commercial temperature grade; I = Industrial temperature grade.  
 (2) Lower number refers to faster speed grade.  
 (3) C2L, I2L, and I3L speed grades are for low-power devices.  
 (4) I3YY speed grades can achieve up to 10.3125 Gbps.

Table 2 lists the industrial and commercial speed grades for the Stratix V GT devices.

**Table 2. Stratix V GT Commercial and Industrial Speed Grade Offering <sup>(1), (2)</sup>**

| Transceiver Speed Grade                            | Core Speed Grade |     |     |     |
|--|------------------|-----|-----|-----|
|  | C1               | C2  | I2  | I3  |
| 2<br>GX channel—12.5 Gbps<br>GT channel—28.05 Gbps | Yes              | Yes | —   | —   |
| 3<br>GX channel—12.5 Gbps<br>GT channel—25.78 Gbps | Yes              | Yes | Yes | Yes |

**Notes to Table 2:**

- (1) C = Commercial temperature grade; I = Industrial temperature grade.  
 (2) Lower number refers to faster speed grade.

**Absolute Maximum Ratings**

Absolute maximum ratings define the maximum operating conditions for Stratix V devices. The values are based on experiments conducted with the devices and theoretical modeling of breakdown and damage mechanisms. The functional operation of the device is not implied for these conditions.



Conditions other than those listed in Table 3 may cause permanent damage to the device. Additionally, device operation at the absolute maximum ratings for extended periods of time may have adverse effects on the device.

**Table 3. Absolute Maximum Ratings for Stratix V Devices (Part 1 of 2)**

| Symbol              | Description  | Minimum | Maximum | Unit |
|---------------------|--|---------|---------|------|
| V <sub>CC</sub>     | Power supply for core voltage and periphery circuitry                  | −0.5    | 1.35    | V    |
| V <sub>CCPT</sub>   | Power supply for programmable power technology                         | −0.5    | 1.8     | V    |
| V <sub>CCPGM</sub>  | Power supply for configuration pins                                    | −0.5    | 3.9     | V    |
| V <sub>CC_AUX</sub> | Auxiliary supply for the programmable power technology                 | −0.5    | 3.4     | V    |
| V <sub>CCBAT</sub>  | Battery back-up power supply for design security volatile key register | −0.5    | 3.9     | V    |
| V <sub>CCPD</sub>   | I/O pre-driver power supply  | −0.5    | 3.9     | V    |
| V <sub>CCIO</sub>   | I/O power supply   | −0.5    | 3.9     | V    |

**Table 3. Absolute Maximum Ratings for Stratix V Devices (Part 2 of 2)**

| Symbol                | Description                    | Minimum | Maximum | Unit |
|-----------------------|--------------------------------|---------|---------|------|
| V <sub>CCD_FPLL</sub> | PLL digital power supply       | −0.5    | 1.8     | V    |
| V <sub>CCA_FPLL</sub> | PLL analog power supply        | −0.5    | 3.4     | V    |
| V <sub>I</sub>        | DC input voltage               | −0.5    | 3.8     | V    |
| T <sub>J</sub>        | Operating junction temperature | −55     | 125     | °C   |
| T <sub>STG</sub>      | Storage temperature (No bias)  | −65     | 150     | °C   |
| I <sub>OUT</sub>      | DC output current per pin      | −25     | 40      | mA   |

Table 4 lists the absolute conditions for the transceiver power supply for Stratix V GX, GS, and GT devices.

**Table 4. Transceiver Power Supply Absolute Conditions for Stratix V GX, GS, and GT Devices**

| Symbol                | Description  | Devices    | Minimum | Maximum | Unit |
|-----------------------|--|------------|---------|---------|------|
| V <sub>CCA_GXBL</sub> | Transceiver channel PLL power supply (left side)             | GX, GS, GT | −0.5    | 3.75    | V    |
| V <sub>CCA_GXBR</sub> | Transceiver channel PLL power supply (right side)            | GX, GS     | −0.5    | 3.75    | V    |
| V <sub>CCA_GTBR</sub> | Transceiver channel PLL power supply (right side)            | GT         | −0.5    | 3.75    | V    |
| V <sub>CCHIP_L</sub>  | Transceiver hard IP power supply (left side)                 | GX, GS, GT | −0.5    | 1.35    | V    |
| V <sub>CCHIP_R</sub>  | Transceiver hard IP power supply (right side)                | GX, GS, GT | −0.5    | 1.35    | V    |
| V <sub>CCHSSI_L</sub> | Transceiver PCS power supply (left side)                     | GX, GS, GT | −0.5    | 1.35    | V    |
| V <sub>CCHSSI_R</sub> | Transceiver PCS power supply (right side)                    | GX, GS, GT | −0.5    | 1.35    | V    |
| V <sub>CCR_GXBL</sub> | Receiver analog power supply (left side)                     | GX, GS, GT | −0.5    | 1.35    | V    |
| V <sub>CCR_GXBR</sub> | Receiver analog power supply (right side)                    | GX, GS, GT | −0.5    | 1.35    | V    |
| V <sub>CCR_GTBR</sub> | Receiver analog power supply for GT channels (right side)    | GT         | −0.5    | 1.35    | V    |
| V <sub>CCT_GXBL</sub> | Transmitter analog power supply (left side)                  | GX, GS, GT | −0.5    | 1.35    | V    |
| V <sub>CCT_GXBR</sub> | Transmitter analog power supply (right side)                 | GX, GS, GT | −0.5    | 1.35    | V    |
| V <sub>CCT_GTBR</sub> | Transmitter analog power supply for GT channels (right side) | GT         | −0.5    | 1.35    | V    |
| V <sub>CCL_GTBR</sub> | Transmitter clock network power supply (right side)          | GT         | −0.5    | 1.35    | V    |
| V <sub>CCH_GXBL</sub> | Transmitter output buffer power supply (left side)           | GX, GS, GT | −0.5    | 1.8     | V    |
| V <sub>CCH_GXBR</sub> | Transmitter output buffer power supply (right side)          | GX, GS, GT | −0.5    | 1.8     | V    |

#### Maximum Allowed Overshoot and Undershoot Voltage


During transitions, input signals may overshoot to the voltage shown in Table 5 and undershoot to −2.0 V for input currents less than 100 mA and periods shorter than 20 ns.

Table 5 lists the maximum allowed input overshoot voltage and the duration of the overshoot voltage as a percentage of device lifetime. The maximum allowed overshoot duration is specified as a percentage of high time over the lifetime of the device. A DC signal is equivalent to 100% of the duty cycle. For example, a signal that overshoots to 3.95 V can be at 3.95 V for only ~21% over the lifetime of the device; for a device lifetime of 10 years, the overshoot duration amounts to ~2 years.

**Table 5. Maximum Allowed Overshoot During Transitions**

| Symbol     | Description      | Condition (V) | Overshoot Duration as %<br>@ $T_J = 100^{\circ}\text{C}$ | Unit |
|------------|------------------|---------------|--|------|
| $V_i$ (AC) | AC input voltage | 3.8           | 100  | %    |
|            |                  | 3.85          | 64   | %    |
|            |                  | 3.9           | 36   | %    |
|            |                  | 3.95          | 21   | %    |
|            |                  | 4             | 12   | %    |
|            |                  | 4.05          | 7  | %    |
|            |                  | 4.1           | 4  | %    |
|            |                  | 4.15          | 2  | %    |
|            |                  | 4.2           | 1  | %    |

**Figure 1. Stratix V Device Overshoot Duration**

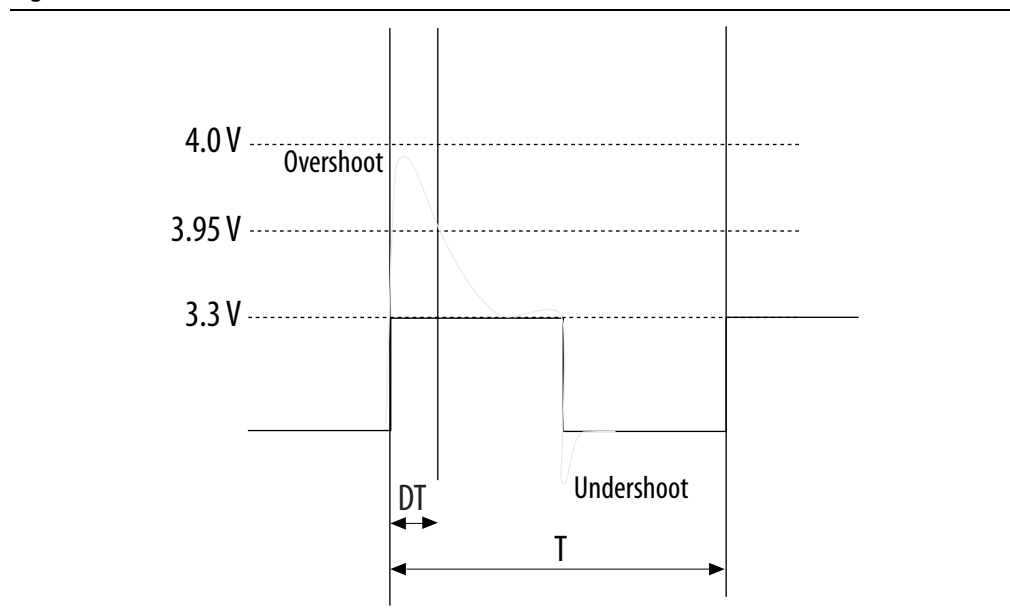

**Table 12. OCT Without Calibration Resistance Tolerance Specifications for Stratix V Devices (Part 2 of 2)**

| Symbol               | Description  | Conditions                        | Resistance Tolerance |        |              |        | Unit |
|----------------------|--|-----------------------------------|----------------------|--------|--------------|--------|------|
|                      |  |                                   | C1                   | C2, I2 | C3, I3, I3YY | C4, I4 |      |
| 50-Ω R <sub>S</sub>  | Internal series termination without calibration (50-Ω setting) | V <sub>CCIO</sub> = 1.8 and 1.5 V | ±30                  | ±30    | ±40          | ±40    | %    |
| 50-Ω R <sub>S</sub>  | Internal series termination without calibration (50-Ω setting) | V <sub>CCIO</sub> = 1.2 V         | ±35                  | ±35    | ±50          | ±50    | %    |
| 100-Ω R <sub>D</sub> | Internal differential termination (100-Ω setting)              | V <sub>CCPD</sub> = 2.5 V         | ±25                  | ±25    | ±25          | ±25    | %    |

Calibration accuracy for the calibrated series and parallel OCTs are applicable at the moment of calibration. When voltage and temperature conditions change after calibration, the tolerance may change.

OCT calibration is automatically performed at power-up for OCT-enabled I/Os. Table 13 lists the OCT variation with temperature and voltage after power-up calibration. Use Table 13 to determine the OCT variation after power-up calibration and Equation 1 to determine the OCT variation without recalibration.

**Equation 1. OCT Variation Without Recalibration for Stratix V Devices <sup>(1), (2), (3), (4), (5), (6)</sup>**

$$R_{OCT} = R_{SCAL} \left( 1 + \left\langle \frac{dR}{dT} \times \Delta T \right\rangle \pm \left\langle \frac{dR}{dV} \times \Delta V \right\rangle \right)$$

**Notes to Equation 1:**

- (1) The R<sub>OCT</sub> value shows the range of OCT resistance with the variation of temperature and V<sub>CCIO</sub>.
- (2) R<sub>SCAL</sub> is the OCT resistance value at power-up.
- (3) ΔT is the variation of temperature with respect to the temperature at power-up.
- (4) ΔV is the variation of voltage with respect to the V<sub>CCIO</sub> at power-up.
- (5) dR/dT is the percentage change of R<sub>SCAL</sub> with temperature.
- (6) dR/dV is the percentage change of R<sub>SCAL</sub> with voltage.

Table 13 lists the on-chip termination variation after power-up calibration.

**Table 13. OCT Variation after Power-Up Calibration for Stratix V Devices (Part 1 of 2) <sup>(1)</sup>**

| Symbol | Description                                      | V <sub>CCIO</sub> (V) | Typical | Unit   |
|--------|--|-----------------------|---------|--------|
| dR/dV  | OCT variation with voltage without recalibration | 3.0                   | 0.0297  | % / mV |
|        |  | 2.5                   | 0.0344  |        |
|        |  | 1.8                   | 0.0499  |        |
|        |  | 1.5                   | 0.0744  |        |
|        |  | 1.2                   | 0.1241  |        |

## Internal Weak Pull-Up Resistor

Table 16 lists the weak pull-up resistor values for Stratix V devices.

**Table 16. Internal Weak Pull-Up Resistor for Stratix V Devices <sup>(1), (2)</sup>**

| Symbol          | Description   | V <sub>CCIO</sub> Conditions (V) <sup>(3)</sup> | Value <sup>(4)</sup> | Unit |
|-----------------|---|---|----------------------|------|
| R <sub>PU</sub> | Value of the I/O pin pull-up resistor before and during configuration, as well as user mode if you enable the programmable pull-up resistor option. | 3.0 ±5%   | 25                   | kΩ   |
|                 |   | 2.5 ±5%   | 25                   | kΩ   |
|                 |   | 1.8 ±5%   | 25                   | kΩ   |
|                 |   | 1.5 ±5%   | 25                   | kΩ   |
|                 |   | 1.35 ±5%  | 25                   | kΩ   |
|                 |   | 1.25 ±5%  | 25                   | kΩ   |
|                 |   | 1.2 ±5%   | 25                   | kΩ   |

### Notes to Table 16:

- (1) All I/O pins have an option to enable the weak pull-up resistor except the configuration, test, and JTAG pins.
- (2) The internal weak pull-down feature is only available for the JTAG TCK pin. The typical value for this internal weak pull-down resistor is approximately 25 kΩ.
- (3) The pin pull-up resistance values may be lower if an external source drives the pin higher than V<sub>CCIO</sub>.
- (4) These specifications are valid with a ±10% tolerance to cover changes over PVT.

## I/O Standard Specifications

Table 17 through Table 22 list the input voltage (V<sub>IH</sub> and V<sub>IL</sub>), output voltage (V<sub>OH</sub> and V<sub>OL</sub>), and current drive characteristics (I<sub>OH</sub> and I<sub>OL</sub>) for various I/O standards supported by Stratix V devices. These tables also show the Stratix V device family I/O standard specifications. The V<sub>OL</sub> and V<sub>OH</sub> values are valid at the corresponding I<sub>OH</sub> and I<sub>OL</sub>, respectively.

For an explanation of the terms used in Table 17 through Table 22, refer to “Glossary” on page 65. For tolerance calculations across all SSTL and HSTL I/O standards, refer to Altera knowledge base solution rd07262012\_486.

**Table 17. Single-Ended I/O Standards for Stratix V Devices**

| I/O Standard | V <sub>CCIO</sub> (V) |     |       | V <sub>IL</sub> (V) |                             | V <sub>IH</sub> (V)         |                         | V <sub>OL</sub> (V)         | V <sub>OH</sub> (V)         | I <sub>OL</sub> (mA) | I <sub>OH</sub> (mA) |
|--------------|-----------------------|-----|-------|---------------------|-----------------------------|-----------------------------|-------------------------|-----------------------------|-----------------------------|----------------------|----------------------|
|              | Min                   | Typ | Max   | Min                 | Max                         | Min                         | Max                     | Max                         | Min                         |                      |                      |
| LVTTTL       | 2.85                  | 3   | 3.15  | −0.3                | 0.8                         | 1.7                         | 3.6                     | 0.4                         | 2.4                         | 2                    | −2                   |
| LVC MOS      | 2.85                  | 3   | 3.15  | −0.3                | 0.8                         | 1.7                         | 3.6                     | 0.2                         | V <sub>CCIO</sub> − 0.2     | 0.1                  | −0.1                 |
| 2.5 V        | 2.375                 | 2.5 | 2.625 | −0.3                | 0.7                         | 1.7                         | 3.6                     | 0.4                         | 2                           | 1                    | −1                   |
| 1.8 V        | 1.71                  | 1.8 | 1.89  | −0.3                | 0.35 *<br>V <sub>CCIO</sub> | 0.65 *<br>V <sub>CCIO</sub> | V <sub>CCIO</sub> + 0.3 | 0.45                        | V <sub>CCIO</sub> − 0.45    | 2                    | −2                   |
| 1.5 V        | 1.425                 | 1.5 | 1.575 | −0.3                | 0.35 *<br>V <sub>CCIO</sub> | 0.65 *<br>V <sub>CCIO</sub> | V <sub>CCIO</sub> + 0.3 | 0.25 *<br>V <sub>CCIO</sub> | 0.75 *<br>V <sub>CCIO</sub> | 2                    | −2                   |
| 1.2 V        | 1.14                  | 1.2 | 1.26  | −0.3                | 0.35 *<br>V <sub>CCIO</sub> | 0.65 *<br>V <sub>CCIO</sub> | V <sub>CCIO</sub> + 0.3 | 0.25 *<br>V <sub>CCIO</sub> | 0.75 *<br>V <sub>CCIO</sub> | 2                    | −2                   |

**Table 21. Differential HSTL and HSUL I/O Standards for Stratix V Devices (Part 2 of 2)**

| I/O Standard        | V <sub>CCIO</sub> (V) |     |      | V <sub>DIF(DC)</sub> (V) |                         | V <sub>X(AC)</sub> (V)       |                           |                              | V <sub>CM(DC)</sub> (V)   |                           |                           | V <sub>DIF(AC)</sub> (V) |                          |
|---------------------|-----------------------|-----|------|--------------------------|-------------------------|------------------------------|---------------------------|------------------------------|---------------------------|---------------------------|---------------------------|--------------------------|--------------------------|
|                     | Min                   | Typ | Max  | Min                      | Max                     | Min                          | Typ                       | Max                          | Min                       | Typ                       | Max                       | Min                      | Max                      |
| HSTL-12 Class I, II | 1.14                  | 1.2 | 1.26 | 0.16                     | V <sub>CCIO</sub> + 0.3 | —                            | 0.5*<br>V <sub>CCIO</sub> | —                            | 0.4*<br>V <sub>CCIO</sub> | 0.5*<br>V <sub>CCIO</sub> | 0.6*<br>V <sub>CCIO</sub> | 0.3                      | V <sub>CCIO</sub> + 0.48 |
| HSUL-12             | 1.14                  | 1.2 | 1.3  | 0.26                     | 0.26                    | 0.5*V <sub>CCIO</sub> – 0.12 | 0.5*<br>V <sub>CCIO</sub> | 0.5*V <sub>CCIO</sub> + 0.12 | 0.4*<br>V <sub>CCIO</sub> | 0.5*<br>V <sub>CCIO</sub> | 0.6*<br>V <sub>CCIO</sub> | 0.44                     | 0.44                     |

**Table 22. Differential I/O Standard Specifications for Stratix V Devices <sup>(7)</sup>**

| I/O Standard                   | V <sub>CCIO</sub> (V) <sup>(10)</sup>  |     |       | V <sub>ID</sub> (mV) <sup>(8)</sup> |                          |     | V <sub>ICM(DC)</sub> (V) |                             |       | V <sub>OD</sub> (V) <sup>(6)</sup> |     |     | V <sub>OCM</sub> (V) <sup>(6)</sup> |      |       |
|--------------------------------|--|-----|-------|-------------------------------------|--------------------------|-----|--------------------------|-----------------------------|-------|------------------------------------|-----|-----|-------------------------------------|------|-------|
|                                | Min  | Typ | Max   | Min                                 | Condition                | Max | Min                      | Condition                   | Max   | Min                                | Typ | Max | Min                                 | Typ  | Max   |
| PCML                           | Transmitter, receiver, and input reference clock pins of the high-speed transceivers use the PCML I/O standard. For transmitter, receiver, and reference clock I/O pin specifications, refer to Table 23 on page 18. |     |       |                                     |                          |     |                          |                             |       |                                    |     |     |                                     |      |       |
| 2.5 V LVDS <sup>(1)</sup>      | 2.375  | 2.5 | 2.625 | 100                                 | V <sub>CM</sub> = 1.25 V | —   | 0.05                     | D <sub>MAX</sub> ≤ 700 Mbps | 1.8   | 0.247                              | —   | 0.6 | 1.125                               | 1.25 | 1.375 |
|                                |  |     |       |                                     |                          | —   | 1.05                     | D <sub>MAX</sub> > 700 Mbps | 1.55  | 0.247                              | —   | 0.6 | 1.125                               | 1.25 | 1.375 |
| BLVDS <sup>(5)</sup>           | 2.375  | 2.5 | 2.625 | 100                                 | —                        | —   | —                        | —                           | —     | —                                  | —   | —   | —                                   | —    | —     |
| RSDS (HIO) <sup>(2)</sup>      | 2.375  | 2.5 | 2.625 | 100                                 | V <sub>CM</sub> = 1.25 V | —   | 0.3                      | —                           | 1.4   | 0.1                                | 0.2 | 0.6 | 0.5                                 | 1.2  | 1.4   |
| Mini-LVDS (HIO) <sup>(3)</sup> | 2.375  | 2.5 | 2.625 | 200                                 | —                        | 600 | 0.4                      | —                           | 1.325 | 0.25                               | —   | 0.6 | 1                                   | 1.2  | 1.4   |
| LVPECL <sup>(4), (9)</sup>     | —  | —   | —     | 300                                 | —                        | —   | 0.6                      | D <sub>MAX</sub> ≤ 700 Mbps | 1.8   | —                                  | —   | —   | —                                   | —    | —     |
|                                |  |     |       |                                     |                          |     | 1                        | D <sub>MAX</sub> > 700 Mbps | 1.6   | —                                  | —   | —   | —                                   | —    | —     |

**Notes to Table 22:**

- (1) For optimized LVDS receiver performance, the receiver voltage input range must be between 1.0 V to 1.6 V for data rates above 700 Mbps, and 0 V to 1.85 V for data rates below 700 Mbps.
- (2) For optimized RSDS receiver performance, the receiver voltage input range must be between 0.25 V to 1.45 V.
- (3) For optimized Mini-LVDS receiver performance, the receiver voltage input range must be between 0.3 V to 1.425 V.
- (4) For optimized LVPECL receiver performance, the receiver voltage input range must be between 0.85 V to 1.75 V for data rate above 700 Mbps and 0.45 V to 1.95 V for data rate below 700 Mbps.
- (5) There are no fixed V<sub>ICM</sub>, V<sub>OD</sub>, and V<sub>OCM</sub> specifications for BLVDS. They depend on the system topology.
- (6) RL range: 90 ≤ RL ≤ 110 Ω.
- (7) The 1.4-V and 1.5-V PCML transceiver I/O standard specifications are described in “Transceiver Performance Specifications” on page 18.
- (8) The minimum V<sub>ID</sub> value is applicable over the entire common mode range, V<sub>CM</sub>.
- (9) LVPECL is only supported on dedicated clock input pins.
- (10) Differential inputs are powered by VCCPD which requires 2.5 V.

## Power Consumption

Altera offers two ways to estimate power consumption for a design—the Excel-based Early Power Estimator and the Quartus® II PowerPlay Power Analyzer feature.

**Table 23. Transceiver Specifications for Stratix V GX and GS Devices <sup>(1)</sup> (Part 6 of 7)**

| Symbol/<br>Description  | Conditions                                   | Transceiver Speed<br>Grade 1 |     |                               | Transceiver Speed<br>Grade 2 |     |                               | Transceiver Speed<br>Grade 3 |     |                                     | Unit |
|---|--|------------------------------|-----|-------------------------------|------------------------------|-----|-------------------------------|------------------------------|-----|-------------------------------------|------|
|   |  | Min                          | Typ | Max                           | Min                          | Typ | Max                           | Min                          | Typ | Max                                 |      |
| Inter-transceiver<br>block transmitter<br>channel-to-<br>channel skew | xN PMA<br>bonded mode                        | —                            | —   | 500                           | —                            | —   | 500                           | —                            | —   | 500                                 | ps   |
| <b>CMU PLL</b>  |  |                              |     |                               |                              |     |                               |                              |     |                                     |      |
| Supported Data<br>Range   | —  | 600                          | —   | 12500                         | 600                          | —   | 12500                         | 600                          | —   | 8500/<br>10312.5<br><sup>(24)</sup> | Mbps |
| t <sub>pll_powerdown</sub> <sup>(15)</sup>                            | —  | 1                            | —   | —                             | 1                            | —   | —                             | 1                            | —   | —                                   | μs   |
| t <sub>pll_lock</sub> <sup>(16)</sup>                                 | —  | —                            | —   | 10                            | —                            | —   | 10                            | —                            | —   | 10                                  | μs   |
| <b>ATX PLL</b>  |  |                              |     |                               |                              |     |                               |                              |     |                                     |      |
| Supported Data<br>Rate Range  | VCO<br>post-divider<br>L=2                   | 8000                         | —   | 14100                         | 8000                         | —   | 12500                         | 8000                         | —   | 8500/<br>10312.5<br><sup>(24)</sup> | Mbps |
|   | L=4  | 4000                         | —   | 7050                          | 4000                         | —   | 6600                          | 4000                         | —   | 6600                                | Mbps |
|   | L=8  | 2000                         | —   | 3525                          | 2000                         | —   | 3300                          | 2000                         | —   | 3300                                | Mbps |
|   | L=8,<br>Local/Central<br>Clock Divider<br>=2 | 1000                         | —   | 1762.5                        | 1000                         | —   | 1762.5                        | 1000                         | —   | 1762.5                              | Mbps |
| t <sub>pll_powerdown</sub> <sup>(15)</sup>                            | —  | 1                            | —   | —                             | 1                            | —   | —                             | 1                            | —   | —                                   | μs   |
| t <sub>pll_lock</sub> <sup>(16)</sup>                                 | —  | —                            | —   | 10                            | —                            | —   | 10                            | —                            | —   | 10                                  | μs   |
| <b>fPLL</b>   |  |                              |     |                               |                              |     |                               |                              |     |                                     |      |
| Supported Data<br>Range   | —  | 600                          | —   | 3250/<br>3125 <sup>(25)</sup> | 600                          | —   | 3250/<br>3125 <sup>(25)</sup> | 600                          | —   | 3250/<br>3125 <sup>(25)</sup>       | Mbps |
| t <sub>pll_powerdown</sub> <sup>(15)</sup>                            | —  | 1                            | —   | —                             | 1                            | —   | —                             | 1                            | —   | —                                   | μs   |



Table 24 shows the maximum transmitter data rate for the clock network.

**Table 24. Clock Network Maximum Data Rate Transmitter Specifications <sup>(1)</sup>**

| Clock Network                  | ATX PLL                |                    |                                       | CMU PLL <sup>(2)</sup> |                    |                                       | fPLL                   |                    |                                       |
|--------------------------------|------------------------|--------------------|---------------------------------------|------------------------|--------------------|---------------------------------------|------------------------|--------------------|---------------------------------------|
|                                | Non-bonded Mode (Gbps) | Bonded Mode (Gbps) | Channel Span                          | Non-bonded Mode (Gbps) | Bonded Mode (Gbps) | Channel Span                          | Non-bonded Mode (Gbps) | Bonded Mode (Gbps) | Channel Span                          |
| x1 <sup>(3)</sup>              | 14.1                   | —                  | 6                                     | 12.5                   | —                  | 6                                     | 3.125                  | —                  | 3                                     |
| x6 <sup>(3)</sup>              | —                      | 14.1               | 6                                     | —                      | 12.5               | 6                                     | —                      | 3.125              | 6                                     |
| x6 PLL Feedback <sup>(4)</sup> | —                      | 14.1               | Side-wide                             | —                      | 12.5               | Side-wide                             | —                      | —                  | —                                     |
| xN (PCIe)                      | —                      | 8.0                | 8                                     | —                      | 5.0                | 8                                     | —                      | —                  | —                                     |
| xN (Native PHY IP)             | 8.0                    | 8.0                | Up to 13 channels above and below PLL | 7.99                   | 7.99               | Up to 13 channels above and below PLL | 3.125                  | 3.125              | Up to 13 channels above and below PLL |
|                                | —                      | 8.01 to 9.8304     | Up to 7 channels above and below PLL  |                        |                    |                                       |                        |                    |                                       |

**Notes to Table 24:**

- (1) Valid data rates below the maximum specified in this table depend on the reference clock frequency and the PLL counter settings. Check the MegaWizard message during the PHY IP instantiation.
- (2) ATX PLL is recommended at 8 Gbps and above data rates for improved jitter performance.
- (3) Channel span is within a transceiver bank.
- (4) Side-wide channel bonding is allowed up to the maximum supported by the PHY IP.

Table 25 shows the approximate maximum data rate using the standard PCS.

**Table 25. Stratix V Standard PCS Approximate Maximum Date Rate <sup>(1)</sup>, <sup>(3)</sup>**

| Mode <sup>(2)</sup> | Transceiver Speed Grade | PMA Width                             | 20      | 20      | 16      | 16      | 10  | 10  | 8    | 8    |
|---------------------|-------------------------|---------------------------------------|---------|---------|---------|---------|-----|-----|------|------|
|                     |                         | PCS/Core Width                        | 40      | 20      | 32      | 16      | 20  | 10  | 16   | 8    |
| FIFO                | 1                       | C1, C2, C2L, I2, I2L core speed grade | 12.2    | 11.4    | 9.76    | 9.12    | 6.5 | 5.8 | 5.2  | 4.72 |
|                     | 2                       | C1, C2, C2L, I2, I2L core speed grade | 12.2    | 11.4    | 9.76    | 9.12    | 6.5 | 5.8 | 5.2  | 4.72 |
|                     |                         | C3, I3, I3L core speed grade          | 9.8     | 9.0     | 7.84    | 7.2     | 5.3 | 4.7 | 4.24 | 3.76 |
|                     | 3                       | C1, C2, C2L, I2, I2L core speed grade | 8.5     | 8.5     | 8.5     | 8.5     | 6.5 | 5.8 | 5.2  | 4.72 |
|                     |                         | I3YY core speed grade                 | 10.3125 | 10.3125 | 7.84    | 7.2     | 5.3 | 4.7 | 4.24 | 3.76 |
|                     |                         | C3, I3, I3L core speed grade          | 8.5     | 8.5     | 7.84    | 7.2     | 5.3 | 4.7 | 4.24 | 3.76 |
|                     |                         | C4, I4 core speed grade               | 8.5     | 8.2     | 7.04    | 6.56    | 4.8 | 4.2 | 3.84 | 3.44 |
| Register            | 1                       | C1, C2, C2L, I2, I2L core speed grade | 12.2    | 11.4    | 9.76    | 9.12    | 6.1 | 5.7 | 4.88 | 4.56 |
|                     | 2                       | C1, C2, C2L, I2, I2L core speed grade | 12.2    | 11.4    | 9.76    | 9.12    | 6.1 | 5.7 | 4.88 | 4.56 |
|                     |                         | C3, I3, I3L core speed grade          | 9.8     | 9.0     | 7.92    | 7.2     | 4.9 | 4.5 | 3.96 | 3.6  |
|                     | 3                       | C1, C2, C2L, I2, I2L core speed grade | 10.3125 | 10.3125 | 10.3125 | 10.3125 | 6.1 | 5.7 | 4.88 | 4.56 |
|                     |                         | I3YY core speed grade                 | 10.3125 | 10.3125 | 7.92    | 7.2     | 4.9 | 4.5 | 3.96 | 3.6  |
|                     |                         | C3, I3, I3L core speed grade          | 8.5     | 8.5     | 7.92    | 7.2     | 4.9 | 4.5 | 3.96 | 3.6  |
|                     |                         | C4, I4 core speed grade               | 8.5     | 8.2     | 7.04    | 6.56    | 4.4 | 4.1 | 3.52 | 3.28 |

**Notes to Table 25:**

- (1) The maximum data rate is in Gbps.
- (2) The Phase Compensation FIFO can be configured in FIFO mode or register mode. In the FIFO mode, the pointers are not fixed, and the latency can vary. In the register mode the pointers are fixed for low latency.
- (3) The maximum data rate is also constrained by the transceiver speed grade. Refer to Table 1 for the transceiver speed grade.

**Table 28. Transceiver Specifications for Stratix V GT Devices (Part 1 of 5) <sup>(1)</sup>**

| Symbol/<br>Description   | Conditions   | Transceiver<br>Speed Grade 2   |           |      | Transceiver<br>Speed Grade 3 |           |      | Unit |
|--|--|--|-----------|------|------------------------------|-----------|------|------|
|  |  | Min  | Typ       | Max  | Min                          | Typ       | Max  |      |
| Reference Clock  |  |  |           |      |                              |           |      |      |
| Supported I/O<br>Standards                                     | Dedicated<br>reference<br>clock pin                    | 1.2-V PCML, 1.4-V PCML, 1.5-V PCML, 2.5-V PCML, Differential LVPECL, LVDS,<br>and HCSL |           |      |                              |           |      |      |
|  | RX reference<br>clock pin                              | 1.4-V PCML, 1.5-V PCML, 2.5-V PCML, LVPECL, and LVDS                                   |           |      |                              |           |      |      |
| Input Reference Clock<br>Frequency (CMU<br>PLL) <sup>(6)</sup> | —  | 40   | —         | 710  | 40                           | —         | 710  | MHz  |
| Input Reference Clock<br>Frequency (ATX PLL) <sup>(6)</sup>    | —  | 100  | —         | 710  | 100                          | —         | 710  | MHz  |
| Rise time  | 20% to 80%   | —  | —         | 400  | —                            | —         | 400  | ps   |
| Fall time  | 80% to 20%   | —  | —         | 400  | —                            | —         | 400  |      |
| Duty cycle   | —  | 45   | —         | 55   | 45                           | —         | 55   | %    |
| Spread-spectrum<br>modulating clock<br>frequency               | PCI Express<br>(PCIe)                                  | 30   | —         | 33   | 30                           | —         | 33   | kHz  |
| Spread-spectrum<br>downspread                                  | PCIe   | —  | 0 to −0.5 | —    | —                            | 0 to −0.5 | —    | %    |
| On-chip termination<br>resistors <sup>(19)</sup>               | —  | —  | 100       | —    | —                            | 100       | —    | Ω    |
| Absolute V <sub>MAX</sub> <sup>(3)</sup>                       | Dedicated<br>reference<br>clock pin                    | —  | —         | 1.6  | —                            | —         | 1.6  | V    |
|  | RX reference<br>clock pin                              | —  | —         | 1.2  | —                            | —         | 1.2  |      |
| Absolute V <sub>MIN</sub>                                      | —  | -0.4   | —         | —    | -0.4                         | —         | —    | V    |
| Peak-to-peak<br>differential input<br>voltage                  | —  | 200  | —         | 1600 | 200                          | —         | 1600 | mV   |
| V <sub>ICM</sub> (AC coupled)                                  | Dedicated<br>reference<br>clock pin                    | 1050/1000 <sup>(2)</sup>   |           |      | 1050/1000 <sup>(2)</sup>     |           |      | mV   |
|  | RX reference<br>clock pin                              | 1.0/0.9/0.85 <sup>(22)</sup>   |           |      | 1.0/0.9/0.85 <sup>(22)</sup> |           |      | V    |
| V <sub>ICM</sub> (DC coupled)                                  | HCSL I/O<br>standard for<br>PCIe<br>reference<br>clock | 250  | —         | 550  | 250                          | —         | 550  | mV   |

**Table 28. Transceiver Specifications for Stratix V GT Devices (Part 3 of 5) <sup>(1)</sup>**

| Symbol/<br>Description   | Conditions                      | Transceiver<br>Speed Grade 2 |               |        | Transceiver<br>Speed Grade 3 |               |        | Unit      |
|--|---------------------------------|------------------------------|---------------|--------|------------------------------|---------------|--------|-----------|
|  |                                 | Min                          | Typ           | Max    | Min                          | Typ           | Max    |           |
| Differential on-chip termination resistors <sup>(7)</sup>                  | GT channels                     | —                            | 100           | —      | —                            | 100           | —      | $\Omega$  |
| Differential on-chip termination resistors for GX channels <sup>(19)</sup> | 85- $\Omega$ setting            | —                            | 85 $\pm$ 30%  | —      | —                            | 85 $\pm$ 30%  | —      | $\Omega$  |
|  | 100- $\Omega$ setting           | —                            | 100 $\pm$ 30% | —      | —                            | 100 $\pm$ 30% | —      | $\Omega$  |
|  | 120- $\Omega$ setting           | —                            | 120 $\pm$ 30% | —      | —                            | 120 $\pm$ 30% | —      | $\Omega$  |
|  | 150- $\Omega$ setting           | —                            | 150 $\pm$ 30% | —      | —                            | 150 $\pm$ 30% | —      | $\Omega$  |
| V <sub>ICM</sub> (AC coupled)  | GT channels                     | —                            | 650           | —      | —                            | 650           | —      | mV        |
| VICM (AC and DC coupled) for GX Channels                                   | VCCR_GXB = 0.85 V or 0.9 V      | —                            | 600           | —      | —                            | 600           | —      | mV        |
|  | VCCR_GXB = 1.0 V full bandwidth | —                            | 700           | —      | —                            | 700           | —      | mV        |
|  | VCCR_GXB = 1.0 V half bandwidth | —                            | 750           | —      | —                            | 750           | —      | mV        |
| t <sub>LTR</sub> <sup>(9)</sup>  | —                               | —                            | —             | 10     | —                            | —             | 10     | $\mu$ s   |
| t <sub>LTD</sub> <sup>(10)</sup>   | —                               | 4                            | —             | —      | 4                            | —             | —      | $\mu$ s   |
| t <sub>LTD_manual</sub> <sup>(11)</sup>                                    | —                               | 4                            | —             | —      | 4                            | —             | —      | $\mu$ s   |
| t <sub>LTR_LTD_manual</sub> <sup>(12)</sup>                                | —                               | 15                           | —             | —      | 15                           | —             | —      | $\mu$ s   |
| Run Length   | GT channels                     | —                            | —             | 72     | —                            | —             | 72     | CID       |
|  | GX channels                     | <sup>(8)</sup>               |               |        |                              |               |        |           |
| CDR PPM  | GT channels                     | —                            | —             | 1000   | —                            | —             | 1000   | $\pm$ PPM |
|  | GX channels                     | <sup>(8)</sup>               |               |        |                              |               |        |           |
| Programmable equalization (AC Gain) <sup>(5)</sup>                         | GT channels                     | —                            | —             | 14     | —                            | —             | 14     | dB        |
|  | GX channels                     | <sup>(8)</sup>               |               |        |                              |               |        |           |
| Programmable DC gain <sup>(6)</sup>  | GT channels                     | —                            | —             | 7.5    | —                            | —             | 7.5    | dB        |
|  | GX channels                     | <sup>(8)</sup>               |               |        |                              |               |        |           |
| Differential on-chip termination resistors <sup>(7)</sup>                  | GT channels                     | —                            | 100           | —      | —                            | 100           | —      | $\Omega$  |
| <b>Transmitter</b>   |                                 |                              |               |        |                              |               |        |           |
| Supported I/O Standards  | —                               | 1.4-V and 1.5-V PCML         |               |        |                              |               |        |           |
| Data rate (Standard PCS)   | GX channels                     | 600                          | —             | 8500   | 600                          | —             | 8500   | Mbps      |
| Data rate (10G PCS)  | GX channels                     | 600                          | —             | 12,500 | 600                          | —             | 12,500 | Mbps      |

Figure 4 shows the differential transmitter output waveform.

**Figure 4. Differential Transmitter/Receiver Output/Input Waveform**



Figure 5 shows the Stratix V AC gain curves for GT channels.

**Figure 5. AC Gain Curves for GT Channels**

**Table 33. Memory Block Performance Specifications for Stratix V Devices <sup>(1), (2)</sup> (Part 2 of 2)**

| Memory     | Mode   | Resources Used |        | Performance |         |     |     |         |               |     | Unit |
|------------|--|----------------|--------|-------------|---------|-----|-----|---------|---------------|-----|------|
|            |  | ALUTs          | Memory | C1          | C2, C2L | C3  | C4  | I2, I2L | I3, I3L, I3YY | I4  |      |
| M20K Block | Single-port, all supported widths  | 0              | 1      | 700         | 700     | 650 | 550 | 700     | 500           | 450 | MHz  |
|            | Simple dual-port, all supported widths   | 0              | 1      | 700         | 700     | 650 | 550 | 700     | 500           | 450 | MHz  |
|            | Simple dual-port with the read-during-write option set to <b>Old Data</b> , all supported widths | 0              | 1      | 525         | 525     | 455 | 400 | 525     | 455           | 400 | MHz  |
|            | Simple dual-port with ECC enabled, 512 × 32  | 0              | 1      | 450         | 450     | 400 | 350 | 450     | 400           | 350 | MHz  |
|            | Simple dual-port with ECC and optional pipeline registers enabled, 512 × 32                      | 0              | 1      | 600         | 600     | 500 | 450 | 600     | 500           | 450 | MHz  |
|            | True dual port, all supported widths   | 0              | 1      | 700         | 700     | 650 | 550 | 700     | 500           | 450 | MHz  |
|            | ROM, all supported widths  | 0              | 1      | 700         | 700     | 650 | 550 | 700     | 500           | 450 | MHz  |

**Notes to Table 33:**

- (1) To achieve the maximum memory block performance, use a memory block clock that comes through global clock routing from an on-chip PLL set to **50%** output duty cycle. Use the Quartus II software to report timing for this and other memory block clocking schemes.
- (2) When you use the error detection cyclical redundancy check (CRC) feature, there is no degradation in F<sub>MAX</sub>.
- (3) The F<sub>MAX</sub> specification is only achievable with Fitter options, **MLAB Implementation In 16-Bit Deep Mode** enabled.

**Temperature Sensing Diode Specifications**

Table 34 lists the internal TSD specification.

**Table 34. Internal Temperature Sensing Diode Specification**

| Temperature Range | Accuracy | Offset Calibrated Option | Sampling Rate  | Conversion Time | Resolution | Minimum Resolution with no Missing Codes |
|-------------------|----------|--------------------------|----------------|-----------------|------------|--|
| –40°C to 100°C    | ±8°C     | No                       | 1 MHz, 500 KHz | < 100 ms        | 8 bits     | 8 bits                                   |

Table 35 lists the specifications for the Stratix V external temperature sensing diode.

**Table 35. External Temperature Sensing Diode Specifications for Stratix V Devices**

| Description                              | Min   | Typ   | Max   | Unit |
|--|-------|-------|-------|------|
| I <sub>bias</sub> , diode source current | 8     | —     | 200   | μA   |
| V <sub>bias</sub> , voltage across diode | 0.3   | —     | 0.9   | V    |
| Series resistance                        | —     | —     | < 1   | Ω    |
| Diode ideality factor                    | 1.006 | 1.008 | 1.010 | —    |

## Periphery Performance

This section describes periphery performance, including high-speed I/O and external memory interface.

I/O performance supports several system interfaces, such as the **LVDS** high-speed I/O interface, external memory interface, and the **PCI/PCI-X** bus interface.

General-purpose I/O standards such as 3.3-, 2.5-, 1.8-, and 1.5-**LVTTL/LVCMOS** are capable of a typical 167 MHz and 1.2-**LVCMOS** at 100 MHz interfacing frequency with a 10 pF load.



The actual achievable frequency depends on design- and system-specific factors. Ensure proper timing closure in your design and perform HSPICE/IBIS simulations based on your specific design and system setup to determine the maximum achievable frequency in your system.

### High-Speed I/O Specification

Table 36 lists high-speed I/O timing for Stratix V devices.

**Table 36. High-Speed I/O Specifications for Stratix V Devices <sup>(1)</sup>, <sup>(2)</sup> (Part 1 of 4)**

| Symbol   | Conditions   | C1  |     |     | C2, C2L, I2, I2L |     |     | C3, I3, I3L, I3YY |     |                    | C4,I4 |     |                    | Unit |
|--|--|-----|-----|-----|------------------|-----|-----|-------------------|-----|--------------------|-------|-----|--------------------|------|
|  |  | Min | Typ | Max | Min              | Typ | Max | Min               | Typ | Max                | Min   | Typ | Max                |      |
| $f_{\text{HCLK\_in}}$ (input clock frequency)<br>True Differential I/O Standards           | Clock boost factor<br>$W = 1$ to 40 <sup>(4)</sup> | 5   | —   | 800 | 5                | —   | 800 | 5                 | —   | 625                | 5     | —   | 525                | MHz  |
| $f_{\text{HCLK\_in}}$ (input clock frequency)<br>Single Ended I/O Standards <sup>(3)</sup> | Clock boost factor<br>$W = 1$ to 40 <sup>(4)</sup> | 5   | —   | 800 | 5                | —   | 800 | 5                 | —   | 625                | 5     | —   | 525                | MHz  |
| $f_{\text{HCLK\_in}}$ (input clock frequency)<br>Single Ended I/O Standards                | Clock boost factor<br>$W = 1$ to 40 <sup>(4)</sup> | 5   | —   | 520 | 5                | —   | 520 | 5                 | —   | 420                | 5     | —   | 420                | MHz  |
| $f_{\text{HCLK\_OUT}}$ (output clock frequency)  | —  | 5   | —   | 800 | 5                | —   | 800 | 5                 | —   | 625 <sup>(5)</sup> | 5     | —   | 525 <sup>(5)</sup> | MHz  |

**Table 36. High-Speed I/O Specifications for Stratix V Devices <sup>(1), (2)</sup> (Part 2 of 4)**

| Symbol   | Conditions  | C1  |     |      | C2, C2L, I2, I2L |     |      | C3, I3, I3L, I3YY |     |      | C4,I4 |     |      | Unit |
|--|---|-----|-----|------|------------------|-----|------|-------------------|-----|------|-------|-----|------|------|
|  |   | Min | Typ | Max  | Min              | Typ | Max  | Min               | Typ | Max  | Min   | Typ | Max  |      |
| Transmitter  |   |     |     |      |                  |     |      |                   |     |      |       |     |      |      |
| True Differential I/O Standards - f <sub>HSDR</sub> (data rate)  | SERDES factor J = 3 to 10 <sup>(9), (11), (12), (13), (14), (15), (16)</sup>  | (6) | —   | 1600 | (6)              | —   | 1434 | (6)               | —   | 1250 | (6)   | —   | 1050 | Mbps |
|  | SERDES factor J ≥ 4<br><br>LVDS TX with DPA <sup>(12), (14), (15), (16)</sup> | (6) | —   | 1600 | (6)              | —   | 1600 | (6)               | —   | 1600 | (6)   | —   | 1250 | Mbps |
|  | SERDES factor J = 2,<br>uses DDR Registers                                    | (6) | —   | (7)  | (6)              | —   | (7)  | (6)               | —   | (7)  | (6)   | —   | (7)  | Mbps |
|  | SERDES factor J = 1,<br>uses SDR Register                                     | (6) | —   | (7)  | (6)              | —   | (7)  | (6)               | —   | (7)  | (6)   | —   | (7)  | Mbps |
| Emulated Differential I/O Standards with Three External Output Resistor Networks - f <sub>HSDR</sub> (data rate) <sup>(10)</sup> | SERDES factor J = 4 to 10 <sup>(17)</sup>                                     | (6) | —   | 1100 | (6)              | —   | 1100 | (6)               | —   | 840  | (6)   | —   | 840  | Mbps |
| t <sub>x Jitter</sub> - True Differential I/O Standards  | Total Jitter for Data Rate 600 Mbps - 1.25 Gbps                               | —   | —   | 160  | —                | —   | 160  | —                 | —   | 160  | —     | —   | 160  | ps   |
|  | Total Jitter for Data Rate < 600 Mbps   | —   | —   | 0.1  | —                | —   | 0.1  | —                 | —   | 0.1  | —     | —   | 0.1  | UI   |
| t <sub>x Jitter</sub> - Emulated Differential I/O Standards with Three External Output Resistor Network                          | Total Jitter for Data Rate 600 Mbps - 1.25 Gbps                               | —   | —   | 300  | —                | —   | 300  | —                 | —   | 300  | —     | —   | 325  | ps   |
|  | Total Jitter for Data Rate < 600 Mbps   | —   | —   | 0.2  | —                | —   | 0.2  | —                 | —   | 0.2  | —     | —   | 0.25 | UI   |



**Table 36. High-Speed I/O Specifications for Stratix V Devices <sup>(1)</sup>, <sup>(2)</sup> (Part 3 of 4)**

| Symbol  | Conditions  | C1             |     |                | C2, C2L, I2, I2L |     |                | C3, I3, I3L, I3YY |     |                | C4, I4         |     |                | Unit |
|---|---|----------------|-----|----------------|------------------|-----|----------------|-------------------|-----|----------------|----------------|-----|----------------|------|
|   |   | Min            | Typ | Max            | Min              | Typ | Max            | Min               | Typ | Max            | Min            | Typ | Max            |      |
| $t_{DUTY}$  | Transmitter output clock duty cycle for both True and Emulated Differential I/O Standards   | 45             | 50  | 55             | 45               | 50  | 55             | 45                | 50  | 55             | 45             | 50  | 55             | %    |
| $t_{RISE}$ & $t_{FALL}$                                     | True Differential I/O Standards   | —              | —   | 160            | —                | —   | 160            | —                 | —   | 200            | —              | —   | 200            | ps   |
|   | Emulated Differential I/O Standards with three external output resistor networks  | —              | —   | 250            | —                | —   | 250            | —                 | —   | 250            | —              | —   | 300            | ps   |
| TCCS  | True Differential I/O Standards   | —              | —   | 150            | —                | —   | 150            | —                 | —   | 150            | —              | —   | 150            | ps   |
|   | Emulated Differential I/O Standards   | —              | —   | 300            | —                | —   | 300            | —                 | —   | 300            | —              | —   | 300            | ps   |
| <b>Receiver</b>   |   |                |     |                |                  |     |                |                   |     |                |                |     |                |      |
| True Differential I/O Standards - $f_{HSDRDPA}$ (data rate) | SERDES factor J = 3 to 10 <sup>(11)</sup> , <sup>(12)</sup> , <sup>(13)</sup> , <sup>(14)</sup> , <sup>(15)</sup> , <sup>(16)</sup> | 150            | —   | 1434           | 150              | —   | 1434           | 150               | —   | 1250           | 150            | —   | 1050           | Mbps |
|   | SERDES factor J $\geq 4$  | 150            | —   | 1600           | 150              | —   | 1600           | 150               | —   | 1600           | 150            | —   | 1250           | Mbps |
|   | LVDS RX with DPA <sup>(12)</sup> , <sup>(14)</sup> , <sup>(15)</sup> , <sup>(16)</sup>  | 150            | —   | 1600           | 150              | —   | 1600           | 150               | —   | 1600           | 150            | —   | 1250           | Mbps |
|   | SERDES factor J = 2, uses DDR Registers   | <sup>(6)</sup> | —   | <sup>(7)</sup> | <sup>(6)</sup>   | —   | <sup>(7)</sup> | <sup>(6)</sup>    | —   | <sup>(7)</sup> | <sup>(6)</sup> | —   | <sup>(7)</sup> | Mbps |
|   | SERDES factor J = 1, uses SDR Register  | <sup>(6)</sup> | —   | <sup>(7)</sup> | <sup>(6)</sup>   | —   | <sup>(7)</sup> | <sup>(6)</sup>    | —   | <sup>(7)</sup> | <sup>(6)</sup> | —   | <sup>(7)</sup> | Mbps |

**Table 40. DQS Phase Offset Delay Per Setting for Stratix V Devices <sup>(1), (2)</sup> (Part 2 of 2)**

| Speed Grade | Min | Max | Unit |
|-------------|-----|-----|------|
| C4,I4       | 8   | 16  | ps   |

**Notes to Table 40:**

- (1) The typical value equals the average of the minimum and maximum values.
- (2) The delay settings are linear with a cumulative delay variation of 40 ps for all speed grades. For example, when using a –2 speed grade and applying a 10-phase offset setting to a 90° phase shift at 400 MHz, the expected average cumulative delay is  $[625 \text{ ps} + (10 \times 10 \text{ ps}) \pm 20 \text{ ps}] = 725 \text{ ps} \pm 20 \text{ ps}$ .

Table 41 lists the DQS phase shift error for Stratix V devices.

**Table 41. DQS Phase Shift Error Specification for DLL-Delayed Clock ( $t_{\text{DQS\_PSERR}}$ ) for Stratix V Devices <sup>(1)</sup>**

| Number of DQS Delay Buffers | C1  | C2, C2L, I2, I2L | C3, I3, I3L, I3YY | C4,I4 | Unit |
|-----------------------------|-----|------------------|-------------------|-------|------|
| 1                           | 28  | 28               | 30                | 32    | ps   |
| 2                           | 56  | 56               | 60                | 64    | ps   |
| 3                           | 84  | 84               | 90                | 96    | ps   |
| 4                           | 112 | 112              | 120               | 128   | ps   |

**Notes to Table 41:**

- (1) This error specification is the absolute maximum and minimum error. For example, skew on three DQS delay buffers in a –2 speed grade is  $\pm 78 \text{ ps}$  or  $\pm 39 \text{ ps}$ .

Table 42 lists the memory output clock jitter specifications for Stratix V devices.

**Table 42. Memory Output Clock Jitter Specification for Stratix V Devices <sup>(1), (Part 1 of 2)</sup> <sup>(2), (3)</sup>**

| Clock Network | Parameter                    | Symbol                 | C1   |     | C2, C2L, I2, I2L |     | C3, I3, I3L, I3YY |      | C4,I4 |      | Unit |
|---------------|------------------------------|------------------------|------|-----|------------------|-----|-------------------|------|-------|------|------|
|               |                              |                        | Min  | Max | Min              | Max | Min               | Max  | Min   | Max  |      |
| Regional      | Clock period jitter          | $t_{\text{JIT(per)}}$  | –50  | 50  | –50              | 50  | –55               | 55   | –55   | 55   | ps   |
|               | Cycle-to-cycle period jitter | $t_{\text{JIT(cc)}}$   | –100 | 100 | –100             | 100 | –110              | 110  | –110  | 110  | ps   |
|               | Duty cycle jitter            | $t_{\text{JIT(duty)}}$ | –50  | 50  | –50              | 50  | –82.5             | 82.5 | –82.5 | 82.5 | ps   |
| Global        | Clock period jitter          | $t_{\text{JIT(per)}}$  | –75  | 75  | –75              | 75  | –82.5             | 82.5 | –82.5 | 82.5 | ps   |
|               | Cycle-to-cycle period jitter | $t_{\text{JIT(cc)}}$   | –150 | 150 | –150             | 150 | –165              | 165  | –165  | 165  | ps   |
|               | Duty cycle jitter            | $t_{\text{JIT(duty)}}$ | –75  | 75  | –75              | 75  | –90               | 90   | –90   | 90   | ps   |

**Table 46. JTAG Timing Parameters and Values for Stratix V Devices**

| Symbol     | Description                              | Min | Max               | Unit |
|------------|--|-----|-------------------|------|
| $t_{JPH}$  | JTAG port hold time                      | 5   | —                 | ns   |
| $t_{JPCO}$ | JTAG port clock to output                | —   | 11 <sup>(1)</sup> | ns   |
| $t_{JPZX}$ | JTAG port high impedance to valid output | —   | 14 <sup>(1)</sup> | ns   |
| $t_{JPXZ}$ | JTAG port valid output to high impedance | —   | 14 <sup>(1)</sup> | ns   |

**Notes to Table 46:**

- (1) A 1 ns adder is required for each  $V_{CCIO}$  voltage step down from 3.0 V. For example,  $t_{JPCO}$  = 12 ns if  $V_{CCIO}$  of the TDO I/O bank = 2.5 V, or 13 ns if it equals 1.8 V.
- (2) The minimum TCK clock period is 167 ns if VCCBAT is within the range 1.2V-1.5V when you perform the volatile key programming.

## Raw Binary File Size

For the POR delay specification, refer to the “POR Delay Specification” section of the “Configuration, Design Security, and Remote System Upgrades in Stratix V Devices”.

Table 47 lists the uncompressed raw binary file (.rbf) sizes for Stratix V devices.

**Table 47. Uncompressed .rbf Sizes for Stratix V Devices**

| Family       | Device | Package                      | Configuration .rbf Size (bits) | IOCSR .rbf Size (bits) <sup>(4), (5)</sup> |
|--------------|--------|------------------------------|--------------------------------|--|
| Stratix V GX | 5SGXA3 | H35, F40, F35 <sup>(2)</sup> | 213,798,880                    | 562,392                                    |
|              |        | H29, F35 <sup>(3)</sup>      | 137,598,880                    | 564,504                                    |
|              | 5SGXA4 | —                            | 213,798,880                    | 563,672                                    |
|              | 5SGXA5 | —                            | 269,979,008                    | 562,392                                    |
|              | 5SGXA7 | —                            | 269,979,008                    | 562,392                                    |
|              | 5SGXA9 | —                            | 342,742,976                    | 700,888                                    |
|              | 5SGXAB | —                            | 342,742,976                    | 700,888                                    |
|              | 5SGXB5 | —                            | 270,528,640                    | 584,344                                    |
|              | 5SGXB6 | —                            | 270,528,640                    | 584,344                                    |
|              | 5SGXB9 | —                            | 342,742,976                    | 700,888                                    |
|              | 5SGXBB | —                            | 342,742,976                    | 700,888                                    |
| Stratix V GT | 5SGTC5 | —                            | 269,979,008                    | 562,392                                    |
|              | 5SGTC7 | —                            | 269,979,008                    | 562,392                                    |
| Stratix V GS | 5SGSD3 | —                            | 137,598,880                    | 564,504                                    |
|              | 5SGSD4 | F1517                        | 213,798,880                    | 563,672                                    |
|              |        | —                            | 137,598,880                    | 564,504                                    |
|              | 5SGSD5 | —                            | 213,798,880                    | 563,672                                    |
|              | 5SGSD6 | —                            | 293,441,888                    | 565,528                                    |
|              | 5SGSD8 | —                            | 293,441,888                    | 565,528                                    |

**Table 53. AS Timing Parameters for AS ×1 and AS ×4 Configurations in Stratix V Devices <sup>(1), (2)</sup> (Part 2 of 2)**

| Symbol       | Parameter   | Minimum  | Maximum | Units |
|--------------|---|--|---------|-------|
| $t_{CD2UM}$  | CONF_DONE high to user mode <sup>(3)</sup>        | 175  | 437     | μs    |
| $t_{CD2CU}$  | CONF_DONE high to CLKUSR enabled                  | 4 × maximum DCLK period                          | —       | —     |
| $t_{CD2UMC}$ | CONF_DONE high to user mode with CLKUSR option on | $t_{CD2CU} + (8576 \times \text{CLKUSR period})$ | —       | —     |

**Notes to Table 53:**

- (1) The minimum and maximum numbers apply only if you choose the internal oscillator as the clock source for initializing the device.
- (2)  $t_{CF2CD}$ ,  $t_{CF2ST0}$ ,  $t_{CFG}$ ,  $t_{STATUS}$ , and  $t_{CF2ST1}$  timing parameters are identical to the timing parameters for PS mode listed in Table 54 on page 63.
- (3) To enable the CLKUSR pin as the initialization clock source and to obtain the maximum frequency specification on this pin, refer to the Initialization section of the “Configuration, Design Security, and Remote System Upgrades in Stratix V Devices” chapter.

## Passive Serial Configuration Timing

Figure 15 shows the timing waveform for a passive serial (PS) configuration when using a MAX II device, MAX V device, or microprocessor as an external host.

**Figure 15. PS Configuration Timing Waveform <sup>(1)</sup>****Notes to Figure 15:**

- (1) The beginning of this waveform shows the device in user mode. In user mode, nCONFIG, nSTATUS, and CONF\_DONE are at logic high levels. When nCONFIG is pulled low, a reconfiguration cycle begins.
- (2) After power-up, the Stratix V device holds nSTATUS low for the time of the POR delay.
- (3) After power-up, before and during configuration, CONF\_DONE is low.
- (4) Do not leave DCLK floating after configuration. You can drive it high or low, whichever is more convenient.
- (5) DATA0 is available as a user I/O pin after configuration. The state of this pin depends on the dual-purpose pin settings in the **Device and Pins Option**.
- (6) To ensure a successful configuration, send the entire configuration data to the Stratix V device. CONF\_DONE is released high after the Stratix V device receives all the configuration data successfully. After CONF\_DONE goes high, send two additional falling edges on DCLK to begin initialization and enter user mode.
- (7) After the option bit to enable the INIT\_DONE pin is configured into the device, the INIT\_DONE goes low.

## Document Revision History

Table 61 lists the revision history for this chapter.

**Table 61. Document Revision History (Part 1 of 3)**

| Date          | Version | Changes   |
|---------------|---------|---|
| June 2018     | 3.9     | <ul style="list-style-type: none"> <li>■ Added the “Stratix V Device Overshoot Duration” figure.</li> </ul>   |
| April 2017    | 3.8     | <ul style="list-style-type: none"> <li>■ Added a footnote to the “High-Speed I/O Specifications for Stratix V Devices” table.</li> <li>■ Changed the minimum value for <math>t_{CD2UMC}</math> in the “PS Timing Parameters for Stratix V Devices” table.</li> <li>■ Changed the condition for <math>100\text{-}\Omega</math> <math>R_D</math> in the “OCT Without Calibration Resistance Tolerance Specifications for Stratix V Devices” table.</li> <li>■ Changed the minimum value for <math>t_{CD2UMC}</math> in the “AS Timing Parameters for AS ‘1 and AS ‘4 Configurations in Stratix V Devices” table</li> <li>■ Changed the minimum value for <math>t_{CD2UMC}</math> in the “FPP Timing Parameters for Stratix V Devices When the DCLK-to-DATA[] Ratio is &gt;1” table.</li> <li>■ Changed the minimum value for <math>t_{CD2UMC}</math> in the “FPP Timing Parameters for Stratix V Devices When the DCLK-to-DATA[] Ratio is &gt;1” table.</li> <li>■ Changed the minimum number of clock cycles value in the “Initialization Clock Source Option and the Maximum Frequency” table.</li> </ul> |
| June 2016     | 3.7     | <ul style="list-style-type: none"> <li>■ Added the <math>V_{ID}</math> minimum specification for LVPECL in the “Differential I/O Standard Specifications for Stratix V Devices” table</li> <li>■ Added the <math>I_{OUT}</math> specification to the “Absolute Maximum Ratings for Stratix V Devices” table.</li> </ul>   |
| December 2015 | 3.6     | <ul style="list-style-type: none"> <li>■ Added a footnote to the “High-Speed I/O Specifications for Stratix V Devices” table.</li> </ul>  |
| December 2015 | 3.5     | <ul style="list-style-type: none"> <li>■ Changed the transmitter, receiver, and ATX PLL data rate specifications in the “Transceiver Specifications for Stratix V GX and GS Devices” table.</li> <li>■ Changed the configuration .rbf sizes in the “Uncompressed .rbf Sizes for Stratix V Devices” table.</li> </ul>  |
| July 2015     | 3.4     | <ul style="list-style-type: none"> <li>■ Changed the data rate specification for transceiver speed grade 3 in the following tables:               <ul style="list-style-type: none"> <li>■ “Transceiver Specifications for Stratix V GX and GS Devices”</li> <li>■ “Stratix V Standard PCS Approximate Maximum Date Rate”</li> <li>■ “Stratix V 10G PCS Approximate Maximum Data Rate”</li> </ul> </li> <li>■ Changed the conditions for reference clock rise and fall time, and added a note to the “Transceiver Specifications for Stratix V GX and GS Devices” table.</li> <li>■ Added a note to the “Minimum differential eye opening at receiver serial input pins” specification in the “Transceiver Specifications for Stratix V GX and GS Devices” table.</li> <li>■ Changed the <math>t_{CO}</math> maximum value in the “AS Timing Parameters for AS ‘1 and AS ‘4 Configurations in Stratix V Devices” table.</li> <li>■ Removed the CDR ppm tolerance specification from the “Transceiver Specifications for Stratix V GX and GS Devices” table.</li> </ul>                                    |