

Welcome to [E-XFL.COM](https://www.e-xfl.com)

### **Embedded - Microcontrollers - Application Specific: Tailored Solutions for Precision and Performance**

**Embedded - Microcontrollers - Application Specific** represents a category of microcontrollers designed with unique features and capabilities tailored to specific application needs. Unlike general-purpose microcontrollers, application-specific microcontrollers are optimized for particular tasks, offering enhanced performance, efficiency, and functionality to meet the demands of specialized applications.

### **What Are Embedded - Microcontrollers - Application Specific?**

Application specific microcontrollers are engineered to

#### **Details**

|                         |                                                                                                                                                               |
|-------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Product Status          | Active                                                                                                                                                        |
| Applications            | Keyboard and Embedded Controller                                                                                                                              |
| Core Processor          | MIPS32® M14K™                                                                                                                                                 |
| Program Memory Type     | External Program Memory                                                                                                                                       |
| Controller Series       | -                                                                                                                                                             |
| RAM Size                | 192KB                                                                                                                                                         |
| Interface               | I <sup>2</sup> C, LPC, SMBus, SPI, UART                                                                                                                       |
| Number of I/O           | 108                                                                                                                                                           |
| Voltage - Supply        | 1.71V ~ 3.465V                                                                                                                                                |
| Operating Temperature   | 0°C ~ 70°C                                                                                                                                                    |
| Mounting Type           | Surface Mount                                                                                                                                                 |
| Package / Case          | 128-WFBGA                                                                                                                                                     |
| Supplier Device Package | 128-WFBGA (7x7)                                                                                                                                               |
| Purchase URL            | <a href="https://www.e-xfl.com/product-detail/microchip-technology/mec1428-tf-c1">https://www.e-xfl.com/product-detail/microchip-technology/mec1428-tf-c1</a> |


# MEC14XX Family

Low-Power Embedded Controllers for Computing Applications

## Modernize Your Computing Platforms

As Intel® Processors fully transition towards the more flexible and efficient eSPI host interface, computing products must progress along with it. The MEC14XX family of devices provides low-power, highly configurable embedded controllers for an effortless transition.

Microchip offers a flexible array of solutions for all mobile platforms including notebooks, tablets, SBCs and industrial controllers. All MEC14XX devices are pin compatible with each other to provide easy migration from LPC-based to eSPI-based designs.

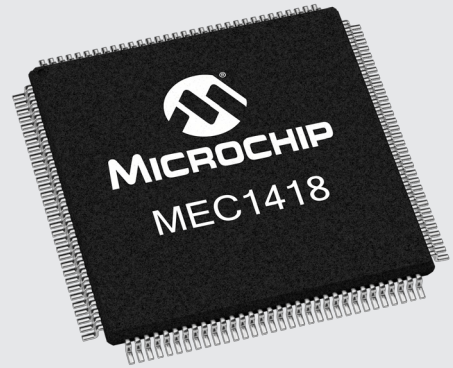

## Key Features


- MIPS32 M14K microcontroller core
- Fully supported by MPLAB Microchip development tools
- 192 KB of SRAM
- eSPI (MEC1418 and MEC1428), LPC, PECEI, PS2 and I<sup>2</sup>C interface
- Flexible Support of 1.8V and 3.3V I/O
- Host interface inflection from LPC to eSPI
- Secure Boot ROM with CRC 32 and AES 128
- Master and slave attached Flash available

## Microchip's eSPI Advantage

- Pioneered eSPI system with industry partners
- Validated with both Intel and AMD platforms
- Fully supports all of eSPI channels




## System Diagram

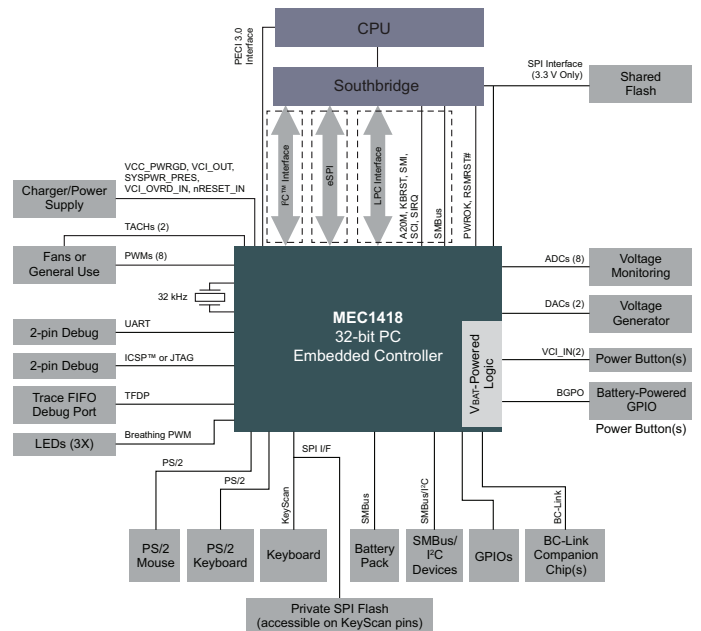



## Development Tools

The MEC14XX family is supported by Microchip's award winning development tools including the MPLAB® XC32 Compiler and MPLAB REAL ICE™ In-Circuit Emulator, the MPLAB ICD 3 In-Circuit Debugger, and the PICkit™ 3 Programmer/Debugger. The MEC1418 and MEC1428 also have demo boards with various features that illustrate the functionality of the embedded controllers. The demo boards can be found at [www.microchipdirect.com/EVB-MEC1418MECC](http://www.microchipdirect.com/EVB-MEC1418MECC) and [www.microchipdirect.com/EVB-MEC1428MECC](http://www.microchipdirect.com/EVB-MEC1428MECC) respectively.

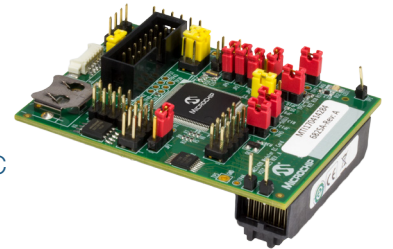

## MEC14XX Products

| Product | Host Interface              | SRAM Memory | Keyboard Matrix Scan Controller | SMBus 2.0 Ports | I <sup>2</sup> C Ports/Controllers | PS/2 Controllers | GPIOs | SPI Interfaces | SPI Flash Support | DACs | ADCs | PWMs | TACHs | UART | Operating Temperature        | Package                             |
|---------|-----------------------------|-------------|---------------------------------|-----------------|------------------------------------|------------------|-------|----------------|-------------------|------|------|------|-------|------|------------------------------|-------------------------------------|
| MEC1408 | LPC, I <sup>2</sup> C       | 192 KB      | 18 x 8                          | 6               | 5/3                                | 2                | 106   | 3              | 3.3V              | 2    | 8    | 8    | 2     | Full | 0°C to 70°C                  | 128-VTQFP<br>144-WFBGA              |
| MEC1418 | eSPI, LPC, I <sup>2</sup> C | 192 KB      | 18 x 8                          | 6               | 5/3                                | 2                | 106   | 3              | 3.3V              | 2    | 8    | 8    | 2     | Full | 0°C to 70°C<br>-40°C to 85°C | 128-VTQFP<br>144-WFBGA              |
| MEC1428 | eSPI, LPC, I <sup>2</sup> C | 192 KB      | 18 x 8                          | 7               | 6/5                                | 2                | 108   | 3              | 1.8V<br>3.3V      | 0    | 8    | 8    | 4     | Full | 0°C to 70°C<br>-40°C to 85°C | 128-WFBGA<br>128-VTQFP<br>144-WFBGA |

The Microchip name and logo, the Microchip logo and MPLAB are registered trademarks and PICkit and REAL ICE are trademarks of Microchip Technology Incorporated in the U.S.A. and other countries. All other trademarks mentioned herein are property of their respective companies. © 2017, Microchip Technology Incorporated. All Rights Reserved. 8/17 DS00002518A